

# WATERPROOFING SYSTEMS

- JOINT SEALING
- BITUMINOUS WATERPROOFING
- MINERAL PRODUCTS
- CEILING EDGE FORMWORK



# TABLE OF CONTENTS

<b>WATERPROOFING SYSTEMS</b>	<b>3</b>
Joint sealing	3
Bituminous waterproofing	8
Primers	10
Mineral products	11
Sealants	12
Ceiling edge formwork	14
<b>ACCESSORIES</b>	<b>16</b>
Cleaner	16
Smoothing aids	16
Tools / Supplies	17
Working safety	19



STT GmbH is one of the leading companies in the market as a producer, wholesaler and developer in the field of structural waterproofing, for system solutions in structural timber construction, as well as for liquid plastics and stone carpets.

As an innovative company, we develop system solutions with high utility value, sustainable functionality and quality together with our customers, suppliers and recognised testing institutions. The production plant in Ebersdorf in Eastern Styria supplies well-known industrial companies, dealers and processors throughout Europe.

Excellent service readiness, competent advice and support from our trained staff, the use of the latest product technologies and ongoing further development of our products ensure that our customers have the necessary edge in the market.



Art. Nr. = Artical number  
 DSK = double self-adhesive strip  
 EH = Unit  
 Geb. = Container  
 Gr. = Size

Kart. = box  
 Comp. = Component  
 lfm = linear metre  
 lt = Litres  
 Pkg = Pack

Rol. = Roll  
 SK = Self-adhesive strips  
 Pcs. = Piece  
 MSRP = Non-binding sales price  
 PU = Packaging unit

### FLEX 150



**Butyl-coated metal waterstop for sealing construction joints in concrete construction.**

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -10°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040101010	<b>FLEX 150</b>	2lfm x 150mm	60lfm	1.200lfm	✓

### FLEX 150 mit Montagefuß



**Butyl-coated metal waterstop with mounting foot for sealing construction joints in concrete construction.**

- Simple and quick assembly without retaining bracket
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -10°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040101020	<b>FLEX 150 with mounting foot</b>	2lfm x 150mm	60lfm	1.200lfm	✓

### FLEX 150 Rolle



**Butyl-coated metal waterstop for sealing construction joints in concrete construction.**

- Simple and quick assembly without retaining bracket
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -10°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040101040	<b>FLEX 150 roll</b>	20lfm x 150mm	20lfm	720lfm	✓

## JOINT SEALING



**BITUFLEX**  
NEUE Prüfungen

Trinkwasser  
Abwasser  
Gülle

### BITUFLEX 150




Bitumen-coated metal waterstop for sealing construction joints in concrete construction.

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040201010	<b>BITUFLEX 150</b>	2lfm x 150mm	60lfm	1.200lfm	✓

### BITUFLEX 150 mit Montagefuß

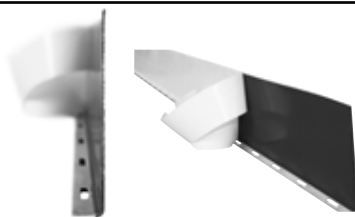

Bitumen-coated metal waterstop with mounting foot for sealing construction joints in concrete construction.

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040201020	<b>BITUFLEX 150 with mounting foot</b>	2lfm x 150mm	60lfm	1.200lfm	✓

### BITUFLEX 150 Rolle



Bitumen-coated metal waterstop for sealing construction joints in concrete construction.

- Simple and quick assembly without retaining bracket
- Extremely high cohesion adhesion
- High adhesive strength and stiffness
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040201040	<b>BITUFLEX 150 roll</b>	20lfm x 150mm	20lfm	720lfm	✓

### BITUFLEX 120



**Bitumen-coated metal waterstop for sealing construction joints in concrete construction.**

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040201030	<b>BITUFLEX 120</b>	2lfm x 120mm	60lfm	1.200lfm	✓

### BITUFLEX 120 E




**Bitumen-coated metal waterstop on one side for sealing construction joints in concrete construction.**

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 1,40mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions	Lfm/Box	Lfm/Pallet	
H040201031	<b>BITUFLEX 120 E</b>	2lfm x 120mm	60lfm	1.200lfm	✓

### BITUFLEX 150 SR-FT



**Coated crack element for precast concrete elements**

- Simple and quick assembly
- Extremely high cohesion adhesion
- High adhesive strength
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Lfm/Pcs.	Pcs./Box	
H040101120	<b>BITUFLEX 150 SR-FT wall 2,20m</b>	2,20lfm	50 Pcs (110lfm)	✓
H040101121	<b>BITUFLEX 150 SR-FT wall 2,35m</b>	2,35lfm	50 Pcs (117,50lfm)	✓
H040101130	<b>BITUFLEX 150 SR-FT corner 2,20m</b>	2,20lfm	50 Pcs (110lfm)	✓
H040101131	<b>BITUFLEX 150 SR-FT corner 2,35m</b>	2,35lfm	50 Pcs (117,50lfm)	✓



# WATERPROOFING SYSTEMS

## JOINT SEALING

### BITUFLEX 150 Eckelement Bodenplatte




Connecting piece for coated target crack elements

- Simple and quick assembly
- Rapid and friction-locked connection
- **Thickness:** 2,20mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Lfm/Box	Lfm/Pallet	
H040101210	<b>BITUFLEX 150 corner element base plate</b>	510mm	125 Pcs.	✓

### DEHNFUGENBAND ANSCHLUSSSTÜCK




Connecting piece between expansion joint tape and Flex 150 or Bituflex 150.

- Easy and quick assembly
- **Thickness:** 5,50mm
- **Processing temperature:** -5°C to +35°C

Art. No.	Product	Dimensions Part 1	Dimensions Part 2	Pcs./Box	
H040601010	<b>DEHNFUGENBAND ANSCHLUSSSTÜCK</b>	250mm x 150mm	50mm x 150mm	20 Pcs.	✓

### HALTEBÜGEL Type M

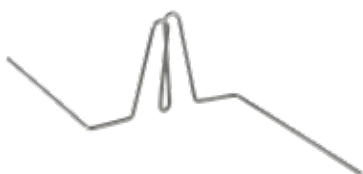

Retaining bracket for Flex 150 and Bituflex 150.

- self-standing formed spring steel wire bracket
- Quick attachment and set up
- 1,5m distance per retaining bracket
- **Thickness:** 3mm wire diameter
- **Shape:** M-shaped
- **Material:** spring steel

Art. No.	Product	Description	Pcs./Box	
H060401010	<b>HALTEBÜGEL typ M</b>	Retaining bracket for FLEX 150 and BITUFLEX 150	40 Pcs.	✓

### HALTEBÜGEL Type R



**Retaining bracket for Flex 150 and Bituflex 150.**

- formed bare iron wire hanger
- Quick attachment and set up
- 1,5m distance per retaining bracket
- **Thickness:** 6mm wire diameter
- **Shape:** R-shaped
- **Material:** bare iron wire

Art. No.	Product	Description	Pcs./Box	
H060401012	<b>HALTEBÜGEL typ R</b>	Retaining bracket for FLEX 150 and BITUFLEX 150	20 Pcs.	✓

### STOSSKLAMMER



**Impact clamp for Flex 150 and Bituflex 150.**

- For mechanical securing of joints

Art. No.	Product	Description	Pcs./Box	
H060401020	<b>STOSSKLAMMER</b>	Butt clamp for FLEX 150 and BITUFLEX 150	100 Pcs.	✓

### SWELLMAX



**Water-swellable sealing tape for sealing concrete construction joints**

- Highly swelling sealing rubber
- Fixation by gluing and with nails
- Installation on straight and level concrete surfaces
- **Swelling:** 500% for rainwater  
400% for concrete water
- **Elongation at break:** >400%
- **Material:** Synthetic rubber

Art. No.	Product	Description	Dimensions	
H040301051	<b>SWELLMAX</b>	Water-swellable sealing tape for the Sealing concrete construction joints	10lfm x 20mm (x5 Rol./Box)	✓

# WATERPROOFING SYSTEMS

## BITUMINOUS WATERPROOFING

### ELASTO BIT



#### Radon-proof, self-adhesive structural waterproofing.

- Tear-resistant, viscoplastic and stretchable
- easy and safe processing
- Immediate rain safety
- **Thickness:** 1,50mm
- **Maximum tensile force:** >200N/5cm
- **Radon tightness:** tight

Art. No.	Product	Description	Dimensions	m <sup>2</sup> /Pallet	
H050101010	<b>ELASTO BIT</b>	Self-adhesive damp proof membrane for full-surface concrete and masonry	15lfm x 1,00m	300m <sup>2</sup>	✓
H050101011	<b>ELASTO BIT width 0,50m</b>		15lfm x 0,50m	300m <sup>2</sup>	✓

### FIX BITUMENBÄNDER



#### One-sided adhesive special bitumen tapes.

- tear-resistant, viscoplastic and stretchable
- building adhesion
- High moisture and climate resistance
- **Thickness:** 0,70mm
- **SD value:** >100m
- **Temperature resistance:** -30°C to +70°C

Art. No.	Product	Description	Dimensions	Rolls/Box	
H050102011	<b>FIX 100</b>	Bitumen tapes made of a tear-resistant, viscoplastic, stretchable HDPE carrier film with a self-adhesive, plasticmodified polymer bitumen coating.	25lfm x 100mm	5 Rol.	✓
H050102012	<b>FIX 150</b>		25lfm x 150mm	3 Rol.	✓
H050102013	<b>FIX 200</b>		25lfm x 200mm	2 Rol.	✓
H050102014	<b>FIX 250</b>		25lfm x 250mm	2 Rol.	✓
H050102015	<b>FIX 333</b>		25lfm x 333mm	3 Rol.	✓

### NOVAPLAST 2K



#### Two-component, polystyrene-filled, polymer-modified bitumen thick coating.

- Solvent-free and crack-bridging
- easy processing
- Good adhesion to concrete and masonry
- **Rain resistance:** 5 - 6 hrs.
- **Processing time:** min. 1 - 2 hrs.
- **Working temperature:** +5°C to +30°C

Art. No.	Product	Description	Container	Cont./Pallet	
H050203162	<b>NOVAPLAST 2K</b>	Two-component, polystyrene-filled, polymer-modified Bitumen thick coating	30lt.	18 Cont.	✓



## BITUMINOUS WATERPROOFING

### BUTYL DUO 20



**Double-sided, extremely strong adhesive butyl system tape.**

- Extremely high adhesive strength a. ageing resistance
- Sealing and airtightness of various building materials
- Can be used indoors and outdoors
- **Thickness:** 1mm
- **Adhesive:** Butylkautschuk
- **Temperature resistance:** +5°C to +40°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030105010	<b>BUTYL DUO 20</b>	30lfm x 20mm	16 Rol.	480 Rol.	✓

### VLIES-BUTYLBAND 100



**Extruded sealing strip based on butyl rubber with fleece.**

- Good adhesion and formability
- Long flexibility
- Compatibility with lacquer, plaster, cement and adhesives
- **Thickness:** 0,80mm
- **Specific gravity:** 1,60g/cm<sup>3</sup>
- **Temperature resistance:** -40°C to +90°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030105080	<b>VLIES-BUTYLBAND 100</b>	10lfm x 100mm	10 Rol.	300 Rol.	✓

# WATERPROOFING SYSTEMS

## PRIMERS

### SPEED PRIMER



Very fast drying primer for Elasto Bit, Fix Bitumbands and Hygroflex System adhesive tapes.

- Very fast drying time
- Remains sticky after drying
- has a surface strengthening effect
- **Basis:** synthetic rubber
- **Processing temperature:** -5°C to +40°C
- **Temperature resistance:** -30°C to +70°C
- **Consumption:** 125ml/m<sup>2</sup>

Art. No.	Product	Description	Container	
H060501011	<b>SPEED PRIMER 1lt.</b>	Butyl- and Bitumenprimer	1lt.	✓
H060501012	<b>SPEED PRIMER 10lt.</b>		10lt.	✓

### MASTER PRIMER KONZENTRAT



Concentrate for sealing concrete surfaces and as a primer for bitumen waterproofing.

- environmentally friendly
- rollable and sprayable
- Fast drying
- **Drying time:** 2 - 3 hrs.
- **Specific gravity:** 1g/cm<sup>3</sup>
- **Processing temperature:** +5°C to +35°C
- **Consumption:** 0,10kg - 0,30kg/m<sup>2</sup>

Art. No.	Product	Description	Container	
H060502210	<b>MASTER PRIMER KONZENTRAT 10lt.</b>	Bitumen primer and protective coating, solvent-free	10lt.	✓

### SPRÜHPRIMER



Used as a ready-to-use, sprayable primer, for porous and smooth surfaces.

- Simple and quick handling
- uniform surface application
- Very good depth effect
- **Spray distance:** 15cm - 25cm
- **Drying time:** app.. 5 - 30 minutes
- **Processing temperature:** +5°C to +35°C
- **Yield:** app. 4m<sup>2</sup>

Art. No.	Product	Description	Container	
H060509020	<b>SPRÜHPRIMER</b>	Ready-to-use, sprayable primer	400ml (x12 Pcs./Box.)	✓

### CONFAST DICHTSCHLÄMME



**Rigid, one-component, cementitious sealing slurry for concrete and masonry.**

- hydrophobic
- Very high adhesion to concrete
- no cracking
- **Bulk density:** 1,6kg/lt.
- **Tensile bond strength:** 1,6N/mm<sup>2</sup>
- **Substrate temperature:** +5°C to +35°C
- **Consumption:** 1,6kg/m<sup>2</sup> per mm layer thickness

Art. No.	Product	Description	Container	
H050601010	<b>CONFAST DICHTSCHLÄMME</b>	Sealing slurry for concrete and masonry	25kg	✓

### CONFAST REPARATURMÖRTEL



**Cementitious repair mortar for all types of standard mineral substrates in a layer thickness of 1-100mm.**

- fibre-reinforced
- Very high adhesion to concrete and masonry
- Good weathering and sulphate resistance
- **Bulk density:** 1,6kg/lt.
- **Tensile bond strength:** 1,8N/mm<sup>2</sup>
- **Substrate temperature:** +5°C to +35°C
- **Consumption:** 1,6kg/m<sup>2</sup> per mm layer thickness

Art. No.	Product	Description	Container	
H050602010	<b>CONFAST REPARATURMÖRTEL</b>	Universal repair mortar	25kg	✓

### CONFAST BODENVERLAUFSMASSE



**Rapid curing and early strength levelling compound on concrete surfaces.**

- long processing time
- Variable layer thicknesses
- Extreme compressive strength
- **Bulk density:** 1,6kg/lt.
- **Chloride ion content:** <0,05%
- **Substrate temperature:** +5°C to +35°C
- **Consumption:** 1,6kg/m<sup>2</sup> per mm layer thickness

Art. No.	Product	Description	Container	
H050603020	<b>CONFAST BODENVERLAUFSMASSE</b>	Floor levelling compound on concrete surfaces	20kg	✓

# WATERPROOFING SYSTEMS

## SEALANTS

### TAURUS ELASTIC PRO



**Solvent-free, one-component, UV-resistant, extremely elastic liquid plastic.**

- Very high chemical resistance for bonding and sealing STT® films, concrete joints etc.
- **Processing temperature:**  $\geq +5^{\circ}\text{C}$
- **Service temperature:**  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$

Art. No.	Product	Description	PU	
H050401226	<b>TAURUS ELASTIC PRO grey 600ml</b>	Extremely elastic liquid plastic for bonding and sealing STT® foils, concrete joints, etc.	600ml (x15 Pcs./Box)	✓
H050401126	<b>TAURUS ELASTIC PRO white 600ml</b>		600ml (x15 Pcs./Box)	✓
H050401660	<b>TAURUS ELASTIC PRO black 600ml</b>		600ml (x15 Pcs./Box)	✓

### BCR 400 V-PLUS



**2-component thixotropic fixing mortar based on vinyl ester, styrene-free, in a special 2-chamber cartridge, double CE and ETA tested.**

- Fast hardening and easy application
- free from harmful substances
- Can be used on damp substrates
- **Processing temperature:** min.  $+5^{\circ}\text{C}$
- **Storage conditions:**  $+5^{\circ}\text{C}$  to  $+30^{\circ}\text{C}$

Art. No.	Product	Description	PU	
S991501010	<b>BCR 400 V-PLUS</b>	2-component thixotropic fixing mortar on a Vinyl ester base	400ml (x12 Pcs./Box)	✓

### UNISCHAUM



**Moisture-curing one-component polyurethane gun foam in E-quality for bonding polystyrene or rigid foam boards in the perimeter area.**

- easy handling and dosing
- for up to  $12\text{m}^2$  wall surface
- free of reprint
- **Glue-free:** 10 - 15 minutes
- **Processing temperature:**  $+5^{\circ}\text{C}$  to  $+35^{\circ}\text{C}$
- **Temperature resistance:**  $-40^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$

Art. No.	Product	Description	PU	
H030503020	<b>UNISCHAUM</b>	Moisture-curing, one-component polyurethane gun foam in E-quality for bonding polystyrene and polystyrene foam. Hard foam panels in the perimeter area	750ml (x12 Pcs./Box)	⊖

### SPRÜHPRIMER



Used as a ready-to-use, sprayable primer, for porous and smooth surfaces.


- Simple and quick handling
- uniform surface application
- Very good depth effect
- **Spray distance:** 15cm - 25cm
- **Drying time:** app. 5 - 30 minutes
- **Processing temperature:** +5°C to +35°C
- **Yield:** app. 4m<sup>2</sup>

Art. No.	Product	Description	PU	
H060509020	<b>SPRÜHPRIMER</b>	Ready-to-use, sprayable primer	400ml (x12 Pcs./Box)	✓

## CEILING EDGE FORMWORK



### DRS 5




Heat-insulating formwork element made of expanded polystyrene.

- Simple and quick installation
- rapid shutdown aid
- reduces cold bridges
- **Building material:** EPS
- **Cell content:** Air
- **Thermal conductivity:** 0,035W/mK

Art. No.	Product	Height	Lfm/Pcs.	Lfm/Pallet	
H070201011	DRS 5 / 160mm	160mm	1,25lfm	180lfm	⊖
H070201012	DRS 5 / 180mm	180mm	1,25lfm	180lfm	⊖
H070201013	DRS 5 / 200mm	200mm	1,25lfm	160lfm	✓
H070201014	DRS 5 / 220mm	220mm	1,25lfm	140lfm	✓
H070201015	DRS 5 / 250mm	250mm	1,25lfm	120lfm	✓

### DRS 10



Heat-insulating formwork element made of expanded polystyrene.


- Simple and quick installation
- rapid shutdown aid
- reduces cold bridges
- **Building material:** EPS
- **Cell content:** Air
- **Thermal conductivity:** 0,035W/mK

Art. No.	Product	Height	Lfm/Pcs.	Lfm/Pallet	
H070201021	DRS 10 / 160mm	160mm	1,25lfm	75lfm	⊖
H070201022	DRS 10 / 180mm	180mm	1,25lfm	60lfm	⊖
H070201023	DRS 10 / 200mm	200mm	1,25lfm	60lfm	⊖
H070201024	DRS 10 / 220mm	220mm	1,25lfm	45lfm	⊖
H070201025	DRS 10 / 250mm	250mm	1,25lfm	45lfm	⊖
H070201026	DRS 10 / 300mm	300mm	1,25lfm	30lfm	⊖



## CEILING EDGE FORMWORK

### DRS 14




Heat-insulating formwork element made of expanded polystyrene.

- Simple and quick installation
- rapid shutdown aid
- reduces cold bridges
- **Building material:** EPS
- **Cell content:** Air
- **Thermal conductivity:** 0,035W/mK

Art. No.	Product	Height	Lfm/Pcs.	Lfm/Pallet	
H070201041	<b>DRS 14 / 160mm</b>	160mm	1,25lfm	56,25lfm	☹
H070201042	<b>DRS 14 / 180mm</b>	180mm	1,25lfm	45,00lfm	☹
H070201043	<b>DRS 14 / 200mm</b>	200mm	1,25lfm	45,00lfm	☹
H070201044	<b>DRS 14 / 220mm</b>	220mm	1,25lfm	33,75lfm	☹
H070201045	<b>DRS 14 / 250mm</b>	250mm	1,25lfm	33,75lfm	☹
H070201046	<b>DRS 14 / 300mm</b>	300mm	1,25lfm	22,50lfm	☹

### DRS 20



Heat-insulating formwork element made of expanded polystyrene.

- Simple and quick installation
- rapid shutdown aid
- reduces cold bridges
- **Building material:** EPS
- **Cell content:** Air
- **Thermal conductivity:** 0,035W/mK

Art. No.	Product	Height	Lfm/Pcs.	Lfm/Pallet	
H070201071	<b>DRS 20 / 160mm</b>	160mm	1,25lfm	37,50lfm	☹
H070201072	<b>DRS 20 / 180mm</b>	180mm	1,25lfm	30,00lfm	☹
H070201073	<b>DRS 20 / 200mm</b>	200mm	1,25lfm	30,00lfm	☹
H070201074	<b>DRS 20 / 220mm</b>	220mm	1,25lfm	22,50lfm	☹
H070201075	<b>DRS 20 / 250mm</b>	250mm	1,25lfm	23,75lfm	☹
H070201076	<b>DRS 20 / 300mm</b>	300mm	1,25lfm	15,00lfm	☹

### UNISCHAUM

Moisture-curing one-component polyurethane gun foam in E-quality for bonding polystyrene or rigid foam boards in the perimeter area.



- easy handling and dosing
- for up to 12m<sup>2</sup> wall surface
- free of reprint
- **Glue-free:** 10 - 15 minutes
- **Processing temperature:** +5°C to +35°C
- **Temperature resistance:** -40°C to +90°C

Art. No.	Product	Description	PU	
H030503020	<b>UNISCHAUM</b>	Moisture-curing, one-component polyurethane gun foam	750ml (x12 Pcs./Box)	☹

Availability : In Stock not in Stock

# ACCESSORIES

## CLEANER

### TAURUS REINIGER



**A cleaner for uncured polyurethane and epoxy resins**

- low-solvent
- No dangerous goods
- Environmentally friendly and user-friendly
- **Density:** 1,05kg/lit.
- **Pour point:** <-10°C
- **Flash point:** +96°C

Art. No.	Product	Description	PU	
H050407002	<b>TAURUS REINIGER 1kg</b>	Industrial cleaner for polyurethane	1kg	✓

### TAURUS REINIGER AKTIV



**Acid-free, biodegradable, mild, active basic and universal cleaner**

- Acid-free
- Universally applicable
- Grease solvent
- **Density:** 1,028g/cm<sup>3</sup>
- **PH value (concentrate):** 10,60
- **Viscosity:** 21mPas

Art. No.	Product	Description	PU	
H050407030	<b>TAURUS REINIGER AKTIV</b>	Basic and universal cleaner	10lt	✓

### TAURUS REINIGER NEUTRAL



**Medium viscosity, synthetic neutral cleaner. Each cleaning refreshes the lustre of the surface.**

- frei von Lösungsmittel
- gut Hautverträglich
- leicht abbaubar
- **Density:** 1,03g/cm<sup>3</sup>
- **PH value (concentrate):** 7,0
- **Viscosity:** 125mm<sup>2</sup>/s

Art. No.	Product	Description	PU	
H050407040	<b>TAURUS REINIGER NEUTRAL</b>	Neutral cleaner	10lt	✓

### TAURUS REINIGUNGSTÜCHER



**Power cleaning wipes.**

- Suitable for surfaces and tools
- Skin-friendly

Art. No.	Product	Description	PU	
H060902020	<b>TAURUS REINIGUNGSTÜCHER</b>	Cleaning cloths	80 Pcs.	✓



### TAURUS FUGENGLATT

Dispersion-based smoothing agent especially for STT® Taurus Elastic Pro as well as for MS hybrids and silicones.

Art. No.	Product	PU	
H060507021	<b>TAURUS FUGENGLATT (250ml)</b>	0,25lt.	✓



### TELE-VERLÄNGERUNG ALU 1,20-2,00m

Aluminium, light and robust. Length 1,20m - 2,00m.

Art. No.	Product	PU	
S991021500	<b>TELE-VERLÄNGERUNG ALU 1,20-2,00m</b>	1 Pcs.	✓



### BONUSPACK-ROLLER 100mm

Especially for dispersions STT® primers and STT® liquid plastics, with 2 spare rollers

Art. No.	Product	PU	
S991022310	<b>BONUSPACK-ROLLER 100mm</b>	1 Pcs.	✓



### FARBROLLER-BÜGEL 250mm

Suitable for thin-bodied, slightly solvent-based paints High-gloss zinc-plated, ergonomic professional handle


Art. No.	Product	PU	
S991023030	<b>FARBROLLER-BÜGEL 250mm</b>	1 Pcs.	✓



### FARBROLLER-BÜGEL 100mm

Suitable for thin-bodied, slightly solvent-based paints High-gloss zinc-plated, ergonomic professional handle


Art. No.	Product	PU	
S991022520	<b>FARBROLLER-BÜGEL 100mm</b>	1 Pcs.	✓



### LACKWALZE 250mm, PAINT-LINE

For floor sealers, coatings, resin and oil-based paints, epoxy paints, synthetic paints.

Art. No.	Product	PU	
S991026256	<b>LACKWALZE 250mm, PAINT-LINE</b>	1 Pcs.	✓



### LASURPINSEL-SET, 3tlg.

Bristle mixture of light bristle and conical brown polyester, galvanised ferrule, green lacquered handle, especially for all solvent and water-based liquids. In the set 1 brush each with 30mm, 50mm and 60mm

Art. No.	Product	PU	
S991070385	<b>LASURPINSEL-SET, 3tlg.</b>	1 Pcs.	✓



### DOSEN- UND FASSÖFFNER

Suitable for all tin cans, buckets and press-in lid tins.

Art. No.	Product	PU	
H060903110	<b>DOSEN- UND FASSÖFFNER</b>	1 Pcs.	✓

# ACCESSORIES

## TOOLS • SUPPLIES



### EINDRÜCKDECKELEIMER 10 LITER

Used for airtight storage of product residues.

Art. No.	Product	PU	
R060101010	<b>EINDRÜCKDECKELEIMER 10 LITER</b>	1 Pcs.	✓



### MISCHEIMER 10 LITER

Consists of polypropylene and is 100% recyclable.


Art. No.	Product	PU	
R060201001	<b>MISCHEIMER 10 LITER</b>	1 Pcs.	✓



### MISCHEIMER 33 LITER

Consists of polypropylene and is 100% recyclable.

Art. No.	Product	PU	
R060201003	<b>MISCHEIMER 33 LITER</b>	1 Pcs.	✓



### AUSPRESSPISTOLE 600ml

Squeeze gun for STT® TAURUS ELASTIC PRO and STT® FIX FOLIEN- KLEB UND DICHTSTOFF.


Art. No.	Product	PU	
H060301011	<b>AUSPRESSPISTOLE 600ml</b>	1 Pcs.	✓



### BOSS 400 AUSPRESSPISTOLE

A very robust squeeze gun in professional quality for BCR 400 V-PLUS.

Art. No.	Product	PU	
H060301030	<b>BOSS 400 AUSPRESSPISTOLE</b>	1 Pcs.	✓



### KARTUSCHENPISTOLE

Sturdy, open, manual cartridge gun with rotating housing for 300ml cartridges

Art. No.	Product	PU	
H060301050	<b>KARTUSCHENPISTOLE</b>	1 Pcs.	✓



### SCHAUMPISTOLE

Gun for filling joints and cavities with gun foam.

Art. No.	Product	PU	
H060301021	<b>SCHAUMPISTOLE</b>	1 Pcs.	✓



### QUARZSAND BEIGE FEUERGETROCKNET

Natural quartz sand, round grain, washed and fire-dried in the colour beige-grey.

Art. No.	Product	PU	
S992057049	<b>Quarzsand BEIGE FIRE-DRIED 0,4-0,8mm</b>	25kg	✓
S991657063	<b>QUARZSAND BEIGE FEUERGETROCKNET 0,06-0,3mm</b>	25kg	✓



### GEBOL SCHUTZBRILLE GETÖNT

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.

Art. No.	Product	PU	
H060904012	<b>GEBOL SCHUTZBRILLE TINTED</b>	1 Pcs.	✓



### DELTA PLUS SCHUTZBRILLE KLAR

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.


Art. No.	Product	PU	
H060904010	<b>DELTA PLUS SCHUTZBRILLE CLEAR</b>	1 Pcs.	✓



### EINWEGHANDSCHUHE NITRIL UNGEPUDERT GR.XL

Professional quality nitrile gloves, heavy duty, non-powdered, suitable for use with food, textured surface on fingertips, can be worn left and right, high tear resistance, rolled edge. Latex free. Dispenser box of 100 pieces.

Art. No.	Product	PU	
H060904023	<b>EINWEGHANDSCHUHE NITRIL NON-POWDERED SIZE XL</b>	100 Pcs./Box	✓

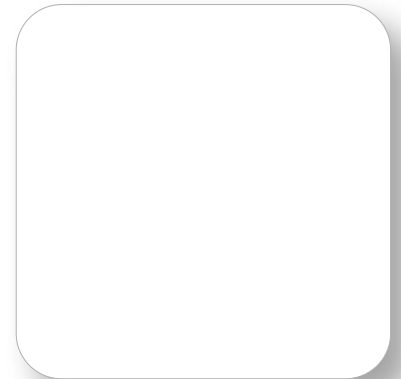

**STT GmbH**  
A-8273 Ebersdorf 226

T: +43 (0) 3333 / 41 241 • E: [office@stt-gmbh.at](mailto:office@stt-gmbh.at)  
F: +43 (0) 3333 / 41 240 • I: [www.stt-gmbh.at](http://www.stt-gmbh.at)

© STT GmbH | Version: 30.07.2024 Subject to typesetting and printing errors as well as changes.

