



AIR- AND WINDPROOFING SYSTEMS

- ROOFING MEMBRANES
- VAPOUR BARRIERS
- ADHESIVE SYSTEMS



WIR HALTEN DICHT!

TABLE OF CONTENTS

ROOFING MEMBRANES	4	WATERPROOFING OF BUILDINGS	20
Raised rainproof sub-roof	4	Bituminous waterproofing	20
Rainproof sub-roof	4	Primers	21
Facade membranes / wind seals	7	LIQUID PLASTICS	22
Underlays	8	Sealings	22
Metal roofs / metal facades	9	ACCESSORIES	23
Ridge Rollers	9	Roofing Membranes Accessories	23
VAPOUR BARRIERS	10	Cleaner	24
Vapour retarders	10	Smoothing aids	24
Vapour barriers	12	Tools / Supplies	25
Trickle protection fleece	13	Working safety	26
ADHESIVE SYSTEMS	14		
Adhesive tapes	14		
Sealants	16		
Nail seals	18		
Window connection tapes	19		

WARRANTY

SYSTEM GUARANTEE FOR AIR AND WINDTIGHTNESS SYSTEMS

We offer our commercial customers comprehensive long-term guarantees for many of our products. If you have any further questions, please contact our STT field service.



Art. Nr. = Article number
DSK = double self-adhesive strip
EH = Unit
Geb. = Container
Gr. = Size

Kart. = box
Comp. = Component
lfm = linear metre
lt = Litres
Pkg = Pack

Rol. = Roll
SK = Self-adhesive strips
Pcs. = Piece
MSRP = Non-binding sales price
PU = Packaging unit



STT GmbH is a successful Austrian company that has established itself as the market leader in Austria in the sale of air and wind sealing systems, building waterproofing, liquid plastics, coatings and stone carpets since it was founded in 2001. Based in Ebersdorf, Styria, and with a team of around 30 employees, we not only supply the Austrian market, but also export our highquality products to over 20 countries worldwide.

With our own development department, we work closely with raw material manufacturers, testing institutes, customers and suppliers to continuously improve our product portfolio as well as detailed and customised solutions.

At STT, we are pioneers in the industry and focus on innovation. With our focus on continuous further development, we offer our customers added value and always remain at the cutting edge of technology.

STT GmbH stands for...

- QUALITY
- CUSTOMER SATISFACTION
- INNOVATION
- RELIABILITY
- OVER 20 YEARS OF EXPERIENCE



ROOFING MEMBRANES

RAISED RAINPROOF SUB-ROOF

EXTREMA MONO 340 DSK



Monolithic bondable shuttering membrane with 2 integrated adhesive strips for increased rainproof sub-roofs from 2° roof pitch in accordance with ÖNORM B 4119, UD TYPE II. Corresponds to classification UDB-A according to ZVDH guideline and according to SIA 232/1 for extraordinary loads.

- High-quality TPU membrane
- High slip, tear and nail pull-out resistance
- passed test of seam strength and shear resistance of the joint seams
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 2°
- **Basis weight:** 350g/m²
- **SD value:** 0,25m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010190010	EXTREMA MONO 340 DSK	25lfm x 1,50m	37,50m ²	1.500m ²	350g/m ²	✓

ATLAS DSK



Monolithic, bondable and weldable formwork membrane with 2 integrated adhesive strips for increased rainproof sub-roofs from 2° roof pitch in accordance with ÖNORM B 4119, UD TYPE II. Corresponds to classification UDB-A in accordance with ZVDH guidelines and SIA 232/1 for exceptional loads. (3m width with one adhesive strip)

- Extremely high tear and nail pull-out resistance
- Welding edge to prevent a suction effect
- Extremely resilient, scratch, impact and abrasion resistant
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 2°
- **Basis weight:** 360g/m²
- **SD value:** ≤0,20m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010301010	ATLAS DSK	25lfm x 1,50m	37,50m ²	1.500m ²	360g/m ²	✓
H010301021	ATLAS SK Breite 3m	25lfm x 3,00m	75m ²	1.500m ²	360g/m ²	✓

EXTREMA 330 DSK



Adhesive shuttering membrane with 2 integrated adhesive strips for increased rainproof sub-roofs from 5° roof pitch according to ÖNORM B 4119. UD TYPE II.

- Very high rainwater impermeability
- high temperature resistance of +80°C
- Easy sealing with the self-adhesive strip
- **Temperature resistance:** -40°C to +80°C
- **Roof pitch:** from 5°
- **Basis weight:** 330g/m²
- **SD value:** 0,025m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010133010	EXTREMA 330 DSK	25lfm x 1,50m	37,50m ²	1.500m ²	330g/m ²	✓

ROOFING MEMBRANES

RAISED RAINPROOF SUB-ROOF

EXTREMA MONO 220 DSK



Monolithic bondable shuttering membrane with 2 integrated adhesive strips for increased rainproof sub-roofs from 15° roof pitch in accordance with ÖNORM B 4119. UD TYPE II. Corresponds to classification UDB-A and USB-A in accordance with ZVDH guidelines.

- High-quality TPU membrane
- High slip, tear and nail pull-out resistance
- resistant to oils, wood preservatives and surfactants
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 220g/m²
- **SD value:** 0,25m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H011279010	EXTREMA MONO 220 DSK	50lfm x 1,50m	75m ²	3.000m ²	220g/m ²	✓

RAINPROOF SUB-ROOF

EXTREMA 200 DSK



Formwork and underlay membrane with 2 integrated adhesive strips according to ÖNORM B 4119. UD TYPE I.

- Extremely open to diffusion and thermowelded
- three-layer structure
- High rainwater impermeability
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 200g/m²
- **SD Value:** 0,03m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010178010	EXTREMA 200 DSK	50lfm x 1,50m	75m ²	3.000m ²	200g/m ²	✓

EXTREMA MONO 200 DSK



Formwork and underlay membrane with 2 integrated adhesive strips in accordance with ÖNORM B 4119. UD TYPE I.

- Extremely open to diffusion and thermowelded
- multilayer structure
- High rainwater impermeability
- **Temperature resistance:** -40°C bis +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 200g/m²
- **SD Value:** 0,25m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H011278010	EXTREMA MONO 200 DSK	50lfm x 1,50m	75m ²	3.000m ²	200g/m ²	✓

Availability : ✓ In Stock ⚠ not in Stock



WIR HALTEN DICHT!

ROOFING MEMBRANES

RAINPROOF SUB-ROOF

EXTREMA 180 DSK



Formwork and underlay membrane with 2 integrated adhesive strips according to ÖNORM B 4119. UD TYPE I.

- Extremely open to diffusion and thermowelded
- three-layer structure
- High rainwater impermeability
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 180g/m²
- **SD value:** 0,02m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010168080	EXTREMA 180	50lfm x 1,50m	75m ²	3.000m ²	180g/m ²	✓
H010168010	EXTREMA 180 DSK	50lfm x 1,50m	75m ²	3.000m ²	180g/m ²	✓
H010168012	EXTREMA 180 DSK Breite 1m	50lfm x 1,00m	50m ²	2.000m ²	180g/m ²	✓

EXTREMA MONO 170 DSK



Formwork and underlay membrane with 2 integrated adhesive strips according to ÖNORM B 4119. UD TYPE I.

- Extremely open to diffusion and thermowelded
- multilayer structure
- High rainwater impermeability
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 170g/m²
- **SD value:** 0,25m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H011275010	EXTREMA MONO 170 DSK	50lfm x 1,50m	75m ²	3.000m ²	170g/m ²	✓

EXTREMA 165 DSK



Formwork and underlay membrane with 2 integrated adhesive strips according to ÖNORM B 4119. UD TYPE I.

- Extremely open to diffusion and thermowelded
- three-layer structure
- High rainwater impermeability
- **Temperature resistance:** -40°C to +100°C
- **Roof pitch:** from 15°
- **Basis weight:** 165g/m²
- **SD value:** 0,02m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010146010	EXTREMA 165 DSK	50lfm x 1,50m	75m ²	3.000m ²	165g/m ²	✓
H010146081	EXTREMA 165 Breite 3m	50lfm x 3,00m	150m ²	3.000m ²	165g/m ²	✓

FASSADENBAHN UV PLUS DSK



UV-resistant, diffusion-open facade and windproofing membrane with increased fire load and two integrated adhesive strips.

- Permanently UV resistant
- increased fire load
- No restriction for shadow joints
- **Temperature resistance:** -40°C to +150°C
- **Basis weight:** 180g/m²
- **SD value:** 0,12m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010501011	FASSADENBAHN UV PLUS DSK	50lfm x 1,50m	75m ²	1.800m ²	180g/m ²	✓

FASSADENBAHN UV DSK



UV-resistant, diffusion-open facade and windproofing membrane.

- permanently UV resistant
- windproof and water-repellent
- No restriction for shadow joints
- **Temperature resistance:** -40°C to +150°C
- **Basis weight:** 180g/m²
- **SD value:** 0,12m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010501010	FASSADENBAHN UV DSK	50lfm x 1,50m	75m ²	1.800m ²	180g/m ²	✓
H010501080	FASSADENBAHN UV	50lfm x 1,50m	75m ²	1.800m ²	180g/m ²	✓

FASSADENBAHN UV 50



UV-resistant, diffusion-open facade and windproofing membrane for horizontal and vertical shadow joints in ventilated facades up to 50 mm wide.

- For rear-ventilated facades with shadow gaps up to 50mm
- 5.000 hrs. UV-Test
- Windproof and water repellent
- **Temperature resistance:** -40°C to +80°C
- **Basis weight:** 160g/m²
- **SD value:** 0,05m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010505080	FASSADENBAHN UV 50 1,50m	50lfm x 1,50m	75m ²	3.000m ²	160g/m ²	✓
H010505081	FASSADENBAHN UV 50 3,00m	50lfm x 3,00m	150m ²	3.000m ²	160g/m ²	✓
H010505010	FASSADENBAHN UV 50 DSK	50lfm x 1,50m	75m ²	3.000m ²	160g/m ²	✓

ROOFING MEMBRANES

WIND SEALS

W-FS

geleitet bei
baubook Reinschauen.
Ökologisch bauen.



Wind and moisture protection for the wall area in timber frame

- Extremely diffusion-open, three-layer, thermowelded
- Liquid-tight, water vapour permeable and tear-resistant
- Microporous membrane between two fleece layers
- **Temperature resistance:** -40°C to +80°C
- **Basis weight:** 120g/m²
- **SD value:** 0,02m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010902080	W-FS Breite 1,50m	50lfm x 1,50m	75m ²	3.000m ²	120g/m ²	✓
H010902081	W-FS Breite 3m	50lfm x 3,00m	150m ²	3.000m ²	120g/m ²	✓

UNDERLAYS

TOP 140



Grid-reinforced underlay. US.

- protects against weather influences
- tear-resistant and permeable to water vapour
- single-variety polyolefin composite
- **Temperature resistance:** -40°C to +80°C
- **Roof pitch:** from 20°
- **Basis weight:** 140g/m²
- **SD value:** 0,20m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010701080	TOP 140	50lfm x 1,50m	75m ²	3.750m ²	140g/m ²	✓

ROOFING MEMBRANES

METAL ROOFS • METAL FACADES

METALLIC SK



Diffusion-open separating layer for metal roofs and metal facades, sound-insulating, UD type I.

- fast processing
- windproof bonding
- **Basis weight:** 440g/m²
- **SD-value:** 0,02m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	Weight in g/m ²	
H010601500	METALLIC SK	25lfm x 1,50m	37,50m ²	225m ²	440g/m ²	☹

RIDGE ROLLERS

PERMOROLL



Easy and quick to install ridge and hip roll for permanent ventilation of the ridge and hip area.

- Glass fabric centre strip
- Connected by aluminium beams
- **Temperature resistance:** -30°C to +70°C
- **Ventilation cross-section:** 200cm²/lfm
- **Working temperature:** -5°C to +40°C

Art. No.	Product	Dimensions	lfm/Box	lfm/Pallet	VPE	
H060801011	PERMOROLL anthracite	5lfm x 310mm	20lfm	720lfm	4 Rol./Box	✓
H060801014	PERMOROLL red					✓
H060801012	PERMOROLL brown					☹
H060801013	PERMOROLL chestnut					✓

Availability : ✓ In Stock ☹ not in Stock

VAPOUR BARRIERS

VAPOUR RETARDERS

EXTREMA SHIELD



Very durable self-adhesive weather protection.

- Vapour retarding effect
- non-slip
- waterproof
- **Basis weight:** 220g/m²
- **SD-value:** app. 2,20m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H021001030	EXTREMA SHIELD	50lfm x 1,50m	75m ²	975m ²	ca. 2,20m	✓

FLEX CONTROL



Diffusion-variable vapour control layer for new construction and renovation.

- Regulates the diffusion of water vapour
- Prevents draughts
- extruded polyamide membrane
- **Basis weight:** 80g/m²
- **SD-value:** 0,15m - 5m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020201030	FLEX CONTROL	25lfm x 1,50m	37,50m ²	1.500m ²	0,15m - 5m	✓

DB FLEX PLUS



Diffusion-variable vapour barrier with a high-performance membrane for new buildings and renovations.

- Regulates the diffusion of water vapour
- Prevents draughts
- extruded polyamide membrane
- **Basis weight:** 80g/m²
- **SD Value:** 0,20m - 25m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020203030	DB FLEX PLUS	25lfm x 1,50m	37,50m ²	1.500m ²	0,20m - 25m	✓

VAPOUR RETARDERS

DB 20 CLASSIC



Easy to install, very stretchable, beige translucent vapour control layer.

- for interior roof extension, (un)ventilated pitched roofs, in timber frame construction wall area
- Rapid and targeted installation
- **Basis weight:** 120g/m²
- **SD-value:** 12m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020122015	DB 20 CLASSIC	25lfm x 1,50m	37,50m ²	1.500m ²	12m	✓
H020122030	DB 20 CLASSIC width 3m	50lfm x 3,00m	150m ²	3.000m ²	12m	✓

DB 30 CLASSIC



Fabric-armoured, easy to install, very stretchable, white translucent vapour control layer.

- for interior roof extension, (un)ventilated pitched roofs, in timber frame construction wall area
- Rapid and targeted installation
- **Basis weight:** 130g/m²
- **SD-value:** 27m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020133010	DB 30 CLASSIC	50lfm x 1,50m	75m ²	3.750m ²	27m	✓

DB 50 STRONG



Easy to install, 4-layer, extremely tear-resistant, robust, translucent vapour control layer as well as underlay and sarking membrane.

- regulates moisture exchange
- Protects thermal insulation
- No moisture penetration
- **Basis weight:** 130g/m²
- **SD-value:** >50m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020105010	DB 50 STRONG	25lfm x 1,50m	37,50m ²	1.500m ²	>50m	✓

VAPOUR BARRIERS

VAPOUR RETARDERS

VAP-STOP



Tested, easy to install, very stretchable, universally applicable vapour control layer.

- high elongation
- regulates moisture exchange
- waterproof
- **Thickness:** 0,20mm
- **SD-value:** >100m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020711200	VAP-STOP 2	25lfm x 2,00m	50m ²	5.000m ²	>100m	✓
H020711300	VAP-STOP 3	25lfm x 3,00m	75m ²	5.250m ²	>100m	✓
H020711400	VAP-STOP 4	25lfm x 4,00m	100m ²	5.000m ²	>100m	✓

ALU TOP 100



Vapour barrier for reducing electrosmog and for sauna construction.

- High barrier effect against water vapour
- up to 99% less electrosmog
- No moisture penetration
- **Basis weight:** 150g/m²
- **SD-value:** 180m
- **Temperature resistance:** +80°C

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020601010	ALU TOP 100	25lfm x 1,50m	37,50m ²	1.500m ²	180m	✓

DS 120 SUPERDICHT



The easy-to-install vapour barrier.

- Very high tear strength
- Central aluminium coating and glass lattice fabric
- liquid-tight
- **Basis weight:** 200g/m²
- **SD-value:** >100m

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020801010	DS 120 SUPERDICHT	50lfm x 1,50m	75m ²	3.000m ²	>100m	✓

ALU TOP 1500



Vapour barrier for interior construction, on trapezoidal sheets, in sauna construction and as a screed vapour barrier.

- High barrier effect against water vapour
- no penetration of moisture
- **Basis weight:** 110g/m² or 140g/m²
- **SD-value:** >1.500m
- **Temperature resistance:** -40°C to +80°C

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H020602020	ALU TOP 1500	25lfm x 1,50m	37,50m ²	1.500m ²	>1.500m	✓
H020604060	ALU TOP 1500 SK	50lfm x 1,50m	75m ²	1.800m ²	≥1.500m	✓

NOVASTOP 1500 SK




Fire load-reduced, emergency roof-compatible, fully self-adhesive bitumen vapour barrier membrane, specially developed for flat roofs and trapezoidal sheet metal structures.

- Very durable with low weight
- Glass fabric reinforcement
- Alkali resistant
- **Thickness:** 0,50mm
- **SD-value:** 1.500mm

Art. No.	Product	Dimensions	m ² /Roll	m ² /Pallet	sd value	
H050103110	NOVASTOP 1500 SK	50lfm x 1,08m	54m ²	1.026m ²	1.500m	⊖

TRICKLE PROTECTION FLEECE

RIESELSCHUTZVLIES

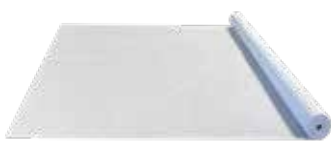

Dust and trickle protection for false ceilings, floors and walls.

- Reliable protection against dust
- Particularly open to diffusion
- easy fixing
- **Basis weight:** 60g/m²

Art. No.	Product	Dimensions	m ² /roll	m ² /pallet	Weight in g/m ²	
H020902030	RIESELSCHUTZVLIES 3,00m	100lfm x 3,00m	300m ²	3.000m ²	60g/m ²	✓

ADHESIVE TAPES

HYGROFLEX



System adhesive tape for airtight and windproof bonding of formwork membranes and vapour retarders.

- Acrylic-based dispersion adhesive
- Extremely high adhesive strength & ageing resistance
- Sealing and airtightness of various building materials
- **Adhesive force:** app. 35N/25mm
- **Processing temperature:** from -10°C
- **Temperature resistance:** -40°C to +100°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030102212	HYGROFLEX 50mm	25lfm x 50mm	12 Rol.	840 Rol.	✓
H030102210	HYGROFLEX 60mm	25lfm x 60mm	10 Rol.	850 Rol.	✓
H030102215	HYGROFLEX 100mm (Liner 50/50)	25lfm x 100mm	6 Rol.	360 Rol.	✓
H030102220	HYGROFLEX 200mm (Liner 100/100)	25lfm x 200mm	2 Rol.	120 Rol.	✓

DICHTPFLASTER



One-sided adhesive PE plaster for airtight bonding of blow-in openings in OSB boards and vapour retarders / vapour barriers.

- Acrylic-based dispersion adhesive
- Extremely high adhesive strength & ageing resistance
- Sealing and airtightness of various building materials
- **Adhesive force:** app. 35N/25mm
- **Processing temperature:** from -10°C
- **Temperature resistance:** -40°C to +100°C

Art. No.	Product	Dimensions	Rolls/Box	Pads/Rolls	
H030110010	DICHTPFLASTER	200mm x 200mm	1 Rol.	ca. 125 Pads	✓

HYGROFLEX VLIES



One-sided adhesive, plasterable special adhesive tape for windtight bonding of roofing membranes / façade membranes and vapour retarders / vapour barriers.

- Acrylic-based system adhesive tape
- Extremely high adhesive strength & ageing resistance
- Sealing and airtightness of various building materials
- **Thickness:** 0,60mm
- **Adhesive force:** app. 35N/25mm
- **Temperature resistance:** -40°C to +100°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030102283	HYGROFLEX VLIES 60mm	25lfm x 60mm	10 Rol.	850 Rol.	✓
H030102086	HYGROFLEX VLIES 75mm	25lfm x 75mm	8 Rol.	680 Rol.	✓

HYGROFLEX UV PLUS



System adhesive tape for windproof and force-fit bonding of formwork and facade membranes.

- Acrylic-based dispersion adhesive
- Ideal for facades with shadow gaps
- Sealing and airtightness of various building materials
- **Thickness:** 0,30mm
- **Adhesive force:** ca. 35N/25mm
- **Temperature resistance:** -40°C to +100°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030103210	HYGROFLEX UV PLUS 60mm	25lfm x 60mm	10 Rol.	600 Rol.	✓
H030103212	HYGROFLEX UV PLUS 100mm	25lfm x 100mm	6 Rol.	510 Rol.	✓

DUO 19



Double-sided adhesive tape for the installation of vapour retarders / vapour barriers.

- Acrylic-based dispersion adhesive
- Extremely high adhesive strength & ageing resistance
- Good plasticiser and temperature resistance
- **Thickness:** ca. 0,20mm
- **Adhesive force:** 35N/25mm
- **Temperature resistance:** -40°C to +120°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030104019	DUO 19	50lfm x 19mm	16 Rol.	1.152 Rol.	✓

DUO 40



Double-sided adhesive tape for the installation of vapour retarders / vapour barriers.

- Acrylic-based dispersion adhesive
- Extremely high adhesive strength & ageing resistance
- Good plasticiser and temperature resistance
- **Thickness:** ca. 0,20mm
- **Adhesive force:** 35N/25mm
- **Temperature resistance:** -40°C to +120°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030104040	DUO 40	25lfm x 40mm	7 Rol.	840 Rol.	✓

ADHESIVE TAPES

BUTYL DUO 20



Double-sided, extremely strong adhesive butyl system tape.

- applicable inside and outside
- Extremely high adhesive strength & ageing resistance
- Sealing and airtightness of various building materials
- **Thickness:** 1mm
- **Adhesive:** butyl rubber
- **Processing temperature:** +5°C to +40°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030105010	BUTYL DUO 20	30lfm x 20mm	16 Rol.	480 Rol.	✓

VLIES-BUTYLBAND 100



Extruded sealing strip based on butyl rubber with fleece.

- Good adhesion and formability
- Long flexibility
- Compatibility with varnish, plaster, cement and adhesives
- **Thickness:** 0,80mm
- **Specific gravity:** 1,60g/cm³
- **Temperature resistance:** -40°C to +90°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030105080	VLIES-BUTYLBAND 100	10lfm x 100mm	10 Rol.	300 Rol.	✓

SEALANTS

TAURUS ELASTIC PRO



Solvent-free, one-component, UV-resistant, extremely elastic liquid plastic.

- Very high chemical resistance
- for bonding and sealing STT® films, concrete joints etc.
- **Processing temperature:** ≥+5°C
- **Service temperature:** -40°C to +100°C

Art. No.	Product	Description	PU	
H050401226	TAURUS ELASTIC PRO grey 600ml	Extremely elastic liquid plastic for bonding and sealing STT® foils, concrete joints, etc.	600ml (x15 Pcs./Box)	✓
H050401126	TAURUS ELASTIC PRO white 600ml		600ml (x15 Pcs./Box)	✓
H050401660	TAURUS ELASTIC PRO black 600ml		600ml (x15 Pcs./Box)	✓

FIX FOLIEN KLEBER PRO



Permanently elastic, solvent-free film adhesive and sealant for indoors and outdoors

- Bonding resistant to driving rain
- for bonding STT® films
- Hybrid technology
- **Processing temperature:** +5°C to +40°C
- **Temperature resistance:** -40°C to +100°C

Art. No.	Product	Description	PU	
H030312010	FIX FOLIENKLEBER PRO 290ml	Permanently elastic, solvent-free film adhesive and sealant	290ml (x24 Pcs./Box.)	✓

FIX FOLIEN KLEB- UND DICHTSTOFF



Permanently elastic, solvent-free film adhesive and sealant.

- Bonding resistant to driving rain
- for bonding STT® films
- Modified dispersion adhesive
- **Processing temperature:** 0°C to +50°C
- **Temperature resistance:** -25°C to +80°C

Art. No.	Product	Description	PU	
H030311010	FIX FOLIEN KLEB- UND DICHTSTOFF 300ml	Permanently elastic, solvent-free film adhesive and sealant	300ml (x20 Pcs./Box)	✓
H030311011	FIX FOLIEN KLEB- UND DICHTSTOFF 600ml		600ml (x20 Pcs./Box)	⚠

BCR 400 V-PLUS




2-component thixotropic fixing mortar based on vinyl ester, styrene-free, in a special 2-chamber cartridge, double CE and ETA tested.

- Fast hardening and easy processing
- free from harmful substances
- Can be used on damp substrates
- **Processing temperature:** min. +5°C
- **Storage conditions:** +5°C to +30°C

Art. No.	Product	Description	PU	
S991501010	BCR 400 V-PLUS	2-C thixotropic fixing mortar based on vinyl ester	400ml (x12 Pcs./Box)	✓

SEALANTS

UNISCHAUM



Moisture-curing one-component polyurethane gun foam in E-quality for bonding polystyrene or rigid foam boards in the perimeter area.

- easy handling and dosing
- for up to 12m² wall surface
- free of reprint
- **Glue-free:** 10 - 15 minutes
- **Processing temperature:** +5°C to +35°C
- **Temperature resistance:** -40°C to +90°C

Art. No.	Product	Description	PU	
H030503020	UNISCHAUM	Moisture-curing, one-component polyurethane gun foam in E-quality for bonding polystyrene and rigid foam panels in the perimeter area	750ml (x12 Pcs./Box)	☹

SPRÜHPRIMER



Used as a ready-to-use, sprayable primer, for porous and smooth surfaces.

- Simple and quick handling
- uniform surface application
- Very good depth effect
- suitable for all STT® adhesive tapes
- **Spray distance:** 15cm - 25cm
- **Drying time:** app. 5 - 30 minutes
- **Processing temperature:** +5°C to +35°C
- **Yield:** app. 4m²

Art. No.	Product	Description	PU	
H060509020	SPRÜHPRIMER	Ready-to-use, sprayable primer	400ml (x12 Pcs./Box.)	✓

NAIL SEALS

NAGELDICHTBAND PE DUO



For permanent and rainproof sealing of nail and screw penetrations.

- Double-sided adhesive PE foam
- acc. to the standard trade of ÖNORM and ZDVH
- Sealing of nailings in the counter batten area
- **Adhesive strength:** Material breakage
- **Processing temperature:** from +5°C
- **Temperature resistance:** -30°C to +80°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030106032	NAGELDICHTBAND PE DUO 70mm	30lfm x 70mm	7 Rol.	126 Rol.	✓
H030106031	NAGELDICHTBAND PE DUO 80mm	30lfm x 80mm	6 Rol.	108 Rol.	✓

NAGELDICHTBAND PE ESK



For permanent and rainproof sealing of nail and screw penetrations.

- PE foam adhesive on one side
- according to ÖNORM and ZDVH standards
- Sealing of nail joints in the counter batten area
- **Adhesive strength:** Material breakage
- **Processing temperature:** from +5°C
- **Temperature resistance:** -30°C to +80°C

Art. No.	Product	Dimensions	Rolls/Box	Rolls/Pallet	
H030106023	NAGELDICHTBAND PE ESK 70mm anthracite	30lfm x 70mm	7 Rol.	126 Rol.	✓

NAGELDICHMASSE



One-component, moisture-curing, liquid nail sealant for sealing of Nail marks caused by roofing membranes / facade membranes.

- Elastic and solvent-free
- Swells during the setting process
- wide range of adhesion
- **Skin forming time:** at +20°C app. 12 minutes
- **Curing time:** at +20°C app. 24 hrs.
- **Density:** app. 1,13g/cm³

Art. No.	Product	PU	Pcs./Box	Pcs./Pallet	
H030601010	NAGELDICHMASSE	1kg	10 Pcs.	320 Pcs.	✓
H060302010	FLÄCHENDÜSE	1 Pcs.	20 Pcs.	200 Pcs.	✓

WINDOW CONNECTION TAPES

WINTEC VARIO FIX



The self-adhesive, diffusion-variable building connection tape for indoors and outdoors.

- Esp. suitable for wooden post & beam construction
- plasterable and paintable
- driving rain-proof
- **SD-value:** app. 0,10m - 6,60m
- **Processing temperature:** -10°C to +35°C
- **Temperature resistance:** -40°C to +80°C

Art. No.	Product	Description	Dimensions	Rolls/Box	
H030204070	WINTEC VARIO FIX 70mm	Building connection tape for inside and outside	40lfm x 70mm	5 Rol.	✓
H030204100	WINTEC VARIO FIX 100mm		40lfm x 100mm	3 Rol.	✓

BUILDING WATERPROOFING

BITUMINOUS WATERPROOFING

ELASTO BIT



Radon-proof, self-adhesive structural waterproofing.

- Tear-resistant, viscoplastic and stretchable
- easy and safe processing
- Immediate rain safety
- **Thickness:** 1,50mm
- **Maximum tensile force:** >200N/5cm
- **Radon tightness:** tight

Art. No.	Product	Description	Dimensions	m ² /Pallet	
H050101010	ELASTO BIT	Self-adhesive damp proof membrane for full-surface concrete and masonry	15lfm x 1,00m	300m ²	✓
H050101011	ELASTO BIT width 0,50m		15lfm x 0,50m	300m ²	✓

FIX BITUMENBÄNDER



One-sided adhesive special bitumen tapes.

- tear-resistant, viscoplastic and stretchable
- building adhesion
- High moisture and climate resistance
- **Thickness:** 0,70mm
- **SD value:** >100m
- **Temperature resistance:** -30°C to +70°C

Art. No.	Product	Description	Dimensions	Rolls/Box	
H050102011	FIX 100	Bitumen tapes made of a tear-resistant, viscoplastic, stretchable HDPE carrier film with a self-adhesive, plasticmodified polymer bitumen coating.	25lfm x 100mm	5 Rol.	✓
H050102012	FIX 150		25lfm x 150mm	3 Rol.	✓
H050102013	FIX 200		25lfm x 200mm	2 Rol.	✓
H050102014	FIX 250		25lfm x 250mm	2 Rol.	✓
H050102015	FIX 333		25lfm x 333mm	3 Rol.	✓

NOVAPLAST 2K



Two-component, polystyrene-filled, polymer-modified bitumen thick coating.

- Solvent-free and crack-bridging
- easy processing
- Good adhesion to concrete and masonry
- **Rain resistance:** 5 - 6 hrs.
- **Processing time:** min. 1 - 2 hrs.
- **Working temperature:** +5°C to +30°C

Art. No.	Product	Description	Container	Cont./Pallet	
H050203162	NOVAPLAST 2K	Two-component, polystyrene-filled, polymer-modified Bitumen thick coating	30lt.	18 Cont.	✓

SPEED PRIMER



Very fast drying primer for Elasto Bit, Fix Bitumbands and Hygroflex System adhesive tapes.

- Very fast drying time
- Remains sticky after drying
- has a surface strengthening effect
- **Basis:** synthetic rubber
- **Processing temperature:** -5°C to +40°C
- **Temperature resistance:** -30°C to +70°C
- **Consumption:** 125ml/m²

Art. No.	Product	Description	Container	
H060501011	SPEED PRIMER 1lt.	Butyl- and Bitumenprimer	1lt.	✓
H060501012	SPEED PRIMER 10lt.		10lt.	✓

MASTER PRIMER KONZENTRAT



Concentrate for sealing concrete surfaces and as a primer for bitumen waterproofing.

- environmentally friendly
- rollable and sprayable
- Fast drying
- solvent-free
- **Drying time:** 2 - 3 hrs.
- **Specific gravity:** 1g/cm³
- **Processing temperature:** +5°C to +35°C
- **Consumption:** 0,10kg - 0,30kg/m²

Art. No.	Product	Description	Container	
H060502210	MASTER PRIMER KONZENTRAT 10lt.	Bitumen primer and protective coating, solvent-free	10lt.	✓

SPRÜHPRIMER



Used as a ready-to-use, sprayable primer, for porous and smooth surfaces.

- Simple and quick handling
- uniform surface application
- Very good depth effect
- **Spray distance:** 15cm - 25cm
- **Drying time:** app.. 5 - 30 minutes
- **Processing temperature:** +5°C to +35°C
- **Yield:** app. 4m²

Art. No.	Product	Description	Container	
H060509020	SPRÜHPRIMER	Ready-to-use, sprayable primer	400ml (x12 Pcs./Box.)	✓

LIQUID PLASTICS

SEALINGS

TAURUS ÖKOFLEX



One-component, solvent-free, UV-stable, flexible, water-based liquid resin according to ETAG 005.

- Fast drying
- Extremely stretchable and abrasion resistant
- Can be tiled immediately after drying
- Can be used indoors and outdoors
- **Drying time:** 1,5h
- **Tear elongation:** 317%
- **Processing temperature:** +5°C to +35°C
- **Consumption:** 2,6kg/m²

Art. No.	Product	Description	PU	
H050314011	TAURUS ÖKOFLEX 20kg	One-component, solvent-free, water-based liquid plastic according to ETAG 005.	20kg	✓

TAURUS ÖKOFLEX PRO



One-component, solvent-, plasticiser- and isocyanate-free, UV-stable, liquid plastic according to ETAG 005.

- Strong adhesion on many substrates without primer
- Can be applied to matt damp substrates
- Walkable after 24 hours
- **Colour:** grey
- **Processing temperature:** +10°C to +30°C
- **Consumption:** 3,5kg/m²

Art. No.	Product	Description	PU	
H050314100	TAURUS ÖKOFLEX PRO 5kg	One-component, solvent-free, liquid plastic according to ETAG 005	5kg	✓
H050314120	TAURUS ÖKOFLEX PRO 20kg		20kg	✓

TAURUS SYSTEMVLIES



Consists of 100% polyester and is used as a layer thickness control and reinforcement insert for Taurus liquid plastics.

- Very good fleece impregnation
- easy processing
- layer thickness regulating
- **Basis weight:** 110g/m²
- **Tensile strength:** 2,3kN/2,7kN/m
- **Elongation:** 40%/75%

Art. No.	Product	Description	PU	
H050455117	TAURUS SYSTEMVLIES 17cm	Layer thickness control and reinforcement insert for processing on horizontal and vertical surfaces, individual width possible on request.	24lfm	✓
H050455126	TAURUS SYSTEMVLIES 26cm		24lfm	✓
H050455135	TAURUS SYSTEMVLIES 35cm		24lfm	✓
H050455052	TAURUS SYSTEMVLIES 52,5cm		24lfm	✓
H050455106	TAURUS SYSTEMVLIES 105cm		24lfm	✓

TAURUS SYSTEMVLIES FERTIGECKE



Used for simple and quick system-bound sealing of external and internal corners.

- huge time-saver
- No incision in the ichthyic area
- Same layer thickness throughout
- **Basis weight:** 110g/m²
- **Carrier:** Polyester fleece
- **Dimensions:** app. 80 x 80mm

Art. No.	Product	Description	PU	
H050411010	TAURUS SYSTEMVLIES FERTIGECKE outside	For simple and quick system-bound sealing	1 Pcs.	✓
H050411020	TAURUS SYSTEMVLIES FERTIGECKE inside		1 Pcs.	✓

ROOFING MEMBRANES ACCESSORIES

BOND



Swelling welding agent for homogeneous welding of the STT® ATLAS formwork sheet.

- **Colour:** colourless
- **Consistency:** liquid
- **Consumption:** approx.. 1lt./200m²

Art. No.	Product	Description	PU	
H060101010	BOND	Swelling welding agent for homogeneous welding of STT® ATLAS Shuttering membrane	1,25lt.	✓

PINSELFLASCHE SET



Accessories for welding STT® ATLAS.

- 500ml PET bottle
- screwed on brush head

Art. No.	Product	Description	PU	
H060101021	PINSELFLASCHE SET	To apply the swelling welding agent	1 Pcs.	✓

ACCESSORIES

CLEANER

TAURUS REINIGER



A cleaner for uncured polyurethane and epoxy resins

- low-solvent
- No dangerous goods
- Environmentally friendly and user-friendly
- **Density:** 1,05kg/lit.
- **Pour point:** <-10°C
- **Flash point:** +96°C

Art. No.	Product	Description	PU	
H050407002	TAURUS REINIGER 1kg	Industrial cleaner for polyurethane	1kg	✓

TAURUS REINIGER AKTIV



Acid-free, biodegradable, mild, active basic and universal cleaner

- Acid-free
- Universally applicable
- Grease solvent
- **Density:** 1,028g/cm³
- **PH value (concentrate):** 10,60
- **Viscosity:** 21mPas

Art. No.	Product	Description	PU	
H050407030	TAURUS REINIGER AKTIV	Basic and universal cleaner	10lt	✓

TAURUS REINIGER NEUTRAL



Medium viscosity, synthetic neutral cleaner. Each cleaning refreshes the lustre of the surface.

- frei von Lösungsmittel
- gut Hautverträglich
- leicht abbaubar
- **Density:** 1,03g/cm³
- **PH value (concentrate):** 7,0
- **Viscosity:** 125mm²/s

Art. No.	Product	Description	PU	
H050407040	TAURUS REINIGER NEUTRAL	Neutral cleaner	10lt	✓

TAURUS REINIGUNGSTÜCHER



Power cleaning wipes.

- Suitable for surfaces and tools
- Skin-friendly

Art. No.	Product	Description	PU	
H060902020	TAURUS REINIGUNGSTÜCHER	Cleaning cloths	80 Pcs.	✓

SMOOTHING AGENT • TOOLS • SUPPLIES



TAURUS FUGENGLATT

Dispersion-based smoothing agent especially for STT® Taurus Elastic Pro as well as for MS hybrids and silicones.

Art. No.	Product	PU	
H060507021	TAURUS FUGENGLATT (250ml)	0,25lt.	✓



BONUSPACK-ROLLER 100mm

Especially for dispersions STT® primers and STT® liquid plastics, with 2 spare rollers

Art. No.	Product	PU	
S991022310	BONUSPACK-ROLLER 100mm	1 Pcs.	✓



LASURPINSEL-SET, 3tlg.

Bristle mixture of light bristle and conical brown polyester, galvanised ferrule, green lacquered handle, especially for all solvent and water-based liquids. In the set 1 brush each with 30mm, 50mm and 60mm

Art. No.	Product	PU	
S991070385	LASURPINSEL-SET, 3tlg.	1 Pcs.	✓



DOSEN- UND FASSÖFFNER

Suitable for all tin cans, buckets and press-in lid tins.

Art. No.	Product	PU	
H060903110	DOSEN- UND FASSÖFFNER	1 Pcs.	✓



EINDRÜCKDECKELEIMER 10 LITER

Used for airtight storage of product residues.

Art. No.	Product	PU	
R060101010	EINDRÜCKDECKELEIMER 10 LITER	1 Pcs.	✓



MISCHEIMER 10 LITER

Consists of polypropylene and is 100% recyclable.


Art. No.	Product	PU	
R060201001	MISCHEIMER 10 LITER	1 Pcs.	✓



MISCHEIMER 33 LITER

Consists of polypropylene and is 100% recyclable.

Art. No.	Product	PU	
R060201003	MISCHEIMER 33 LITER	1 Pcs.	✓

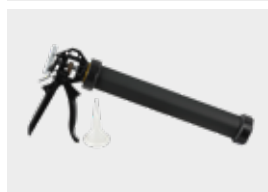

AUSPRESSPISTOLE 600ml

Squeeze gun for STT® TAURUS ELASTIC PRO and STT® FIX FOLIEN- KLEB UND DICHTSTOFF.

Art. No.	Product	PU	
H060301011	AUSPRESSPISTOLE 600ml	1 Pcs.	✓

ACCESSORIES

TOOLS • SUPPLIES



BOSS 400 AUSPRESSPISTOLE

A very robust squeeze gun in professional quality for BCR 400 V-PLUS.

Art. No.	Product	PU	
H060301030	BOSS 400 AUSPRESSPISTOLE	1 Pcs.	✓



KARTUSCHENPISTOLE

Sturdy, open, manual cartridge gun with rotating housing for 300ml cartridges

Art. No.	Product	PU	
H060301050	KARTUSCHENPISTOLE	1 Pcs.	✓



SCHAUMPISTOLE

Gun for filling joints and cavities with gun foam.

Art. No.	Product	PU	
H060301021	SCHAUMPISTOLE	1 Pcs.	✓

WORK SAFETY



GEBOL SCHUTZBRILLE GETÖNT

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.

Art. No.	Product	PU	
H060904012	GEBOL SCHUTZBRILLE TINED	1 Pcs.	✓



DELTA PLUS SCHUTZBRILLE KLAR

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.


Art. No.	Product	PU	
H060904010	DELTA PLUS SCHUTZBRILLE CLEAR	1 Pcs.	✓



EINWEGHANDSCHUHE NITRIL UNGEPUDERT GR.XL

Professional quality nitrile gloves, heavy duty, non-powdered, suitable for use with food, textured surface on fingertips, can be worn left and right, high tear resistance, rolled edge. Latex free. Dispenser box of 100 pieces.

Art. No.	Product	PU	
H060904023	EINWEGHANDSCHUHE NITRIL NON-POWDERED SIZE XL	100 Pcs./Box	✓

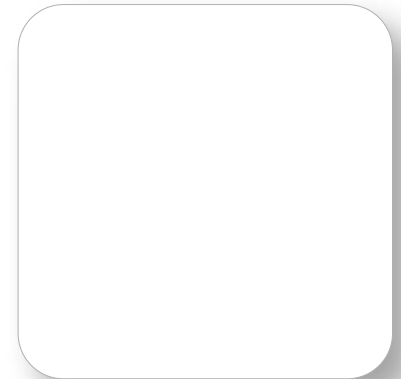

STT GmbH
A-8273 Ebersdorf 226

T: +43 (0) 3333 / 41 241 • E: office@stt-gmbh.at
F: +43 (0) 3333 / 41 240 • I: www.stt-gmbh.at

© STT GmbH | Date 21.11.2024 Subject to typographical and printing errors and changes.

