



LIQUID PLASTICS

- PRIMER
- SEALING
- CRACK INJECTION
- ACCESSORIES



TABLE OF CONTENTS

TECHNICAL STANDARDS	3
ÖNORMEN	3
TABLES	5
Primer overview	5
Compatibility table	7
LIQUID PLASTICS	8
Primers	8
Sealings	10
Sealings sprayable	15
Crack injection	15
ACCESSORIES	16
Cleaner	16
Smoothing aids / levelling agents / fillers	16
Tools / Auxiliaries	17
Occupational safety and health	19



STT GmbH is one of the leading companies in the market as a producer, wholesaler and developer in the field of structural waterproofing, for system solutions in structural timber construction, as well as for liquid plastics and stone carpets.

As an innovative company, we develop system solutions with high utility value, sustainable functionality and quality together with our customers, suppliers and recognised testing institutions. The production plant in Ebersdorf in Eastern Styria supplies well-known industrial companies, dealers and processors throughout Europe.

Excellent service readiness, competent advice and support from our trained staff, the use of the latest product technologies and ongoing further development of our products ensure that our customers have the necessary edge in the market.



Art. Nr. = Artikel number
DSK = double self-adhesive strip
EH = Unit
Geb. = Container
Gr. = Size

Kart. = box
Comp. = Component
lfm = linear metre
lt = Litres
Pkg = Pack

Rol. = Roll
SK = Self-adhesive strips
Pcs. = Piece
MSRP = Non-binding sales price
PU = Packaging unit

ÖNORM B 3691 - ROOF WATERPROOFING

APPLICATION AREAS

- Planning and execution of
- Bitumen and plastic sheeting
- Waterproofing membranes
- Liquid waterproofing

PLANNING (acc. to 6.5.1)

Application category	Minimum thickness ^a mm
K1	1,8mm
K2	2,1mm
K3 ^c	2,4mm ^b

^a No individual value may be more than 5% less than the minimum layer thickness in the fully dried state. If the minimum thickness specified in the European Technical Approval is greater than the minimum layer thickness required by this ÖNORM, the higher value shall apply.

^b Including a different coloured sealing of the surface.

^c The normal service life of liquid waterproofing is 25 years according to ETAG 005 (all parts).

ÖNORM B 3692 - Waterproofing of buildings

APPLICATION AREA


- Components in contact with the ground
- Damp rooms (waterproofing at shell level)
- Container with bitumen and plastic sheeting
- Liquid waterproofing and bitumen thick coatings

LAST-FALL-RELATED SEALING MEASURES (according to Table 7)

Materials	Soil moisture	Non-pressing water	Pressurised water up to 4m immersion depth	Tank with max. water height of 20m
Liquid plastics according to ETAG 005	1,5mm	2,0mm	2,0mm	2,0mm


ÖNORMEN

Assignment of the components to be sealed to the individual ÖNORM

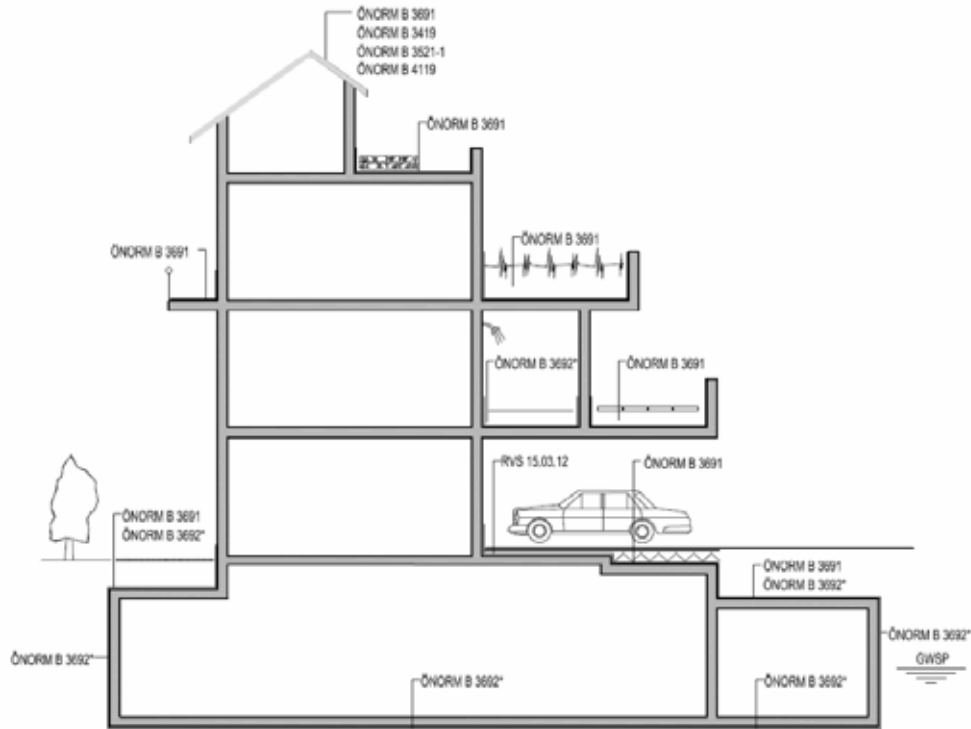

LAYER STRUCTURE LIQUID PLASTIC

Liquid waterproofing materials are single- or multi-component waterproofing materials to be applied in liquid form with a Taurus system fleece insert for reinforcement and to ensure a uniform minimum layer thickness. The individual Taurus system fleece sheets must overlap by at least 50 mm. If transitions from liquid-applied waterproofing to adjacent building components are carried out, the material compatibility, adhesive strength and watertightness must be tested in advance. The connection width must always be at least 100mm.

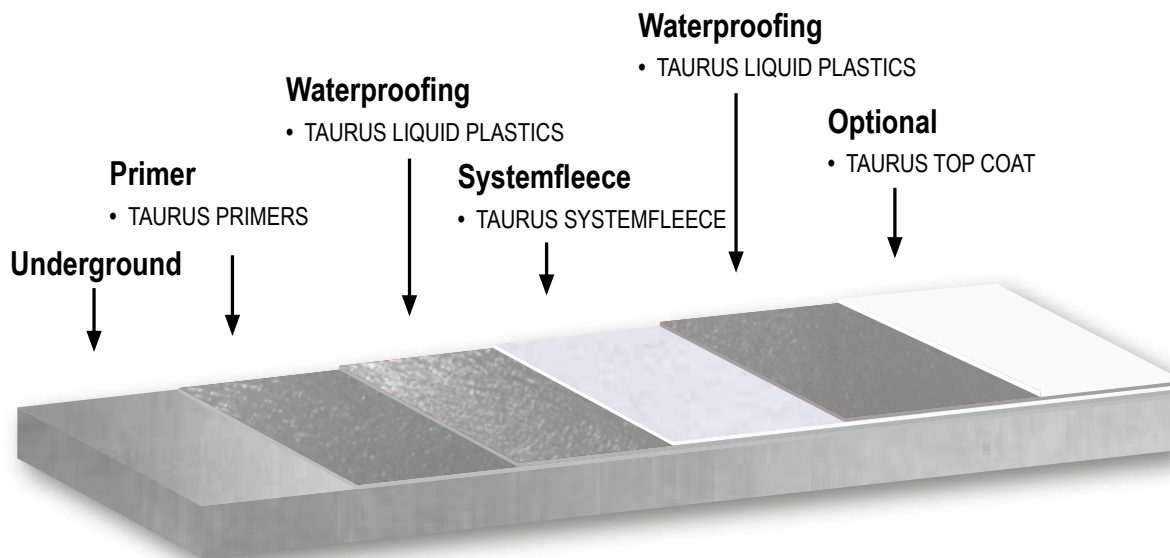

PRIMER OVERVIEW

- suitable
- Suitability test required
- not suitable

* fire-dried quartz sand in excess
0,4-0,8mm

	TAURUS PRIMER FAST	TAURUS PRIMER 2K	TAURUS EPOXY PRIMER 2K	TAURUS PRIMER CLEAR	TAURUS PVC PRIMER	TAURUS TPO / FPO PRIMER	TAURUS ÖKOFLEX PRIMER	TAURUS NANO PRIMER	TAURUS AQUATOP MONO PRIMER
--	--------------------	------------------	------------------------	---------------------	-------------------	-------------------------	-----------------------	--------------------	----------------------------

TECHNICAL DATA

GENERAL									
Consumption / m ²	100-500ml	100-200ml	100-150ml	100-150ml	100ml	100ml	100-300ml	50-200ml	100-300ml
Revisable	1-3 hrs.	2-5 hrs.	2-24 hrs.	15-30 min.	15-30 min.	15-30 min.	15-30 min.	12-24 hrs.	30-60 min.
DIFFUSION BEHAVIOUR									
diffusion-open	✓	✓		✓	✓	✓	✓	✓	✓
diffusion-tight / vapour-tight			✓						
SOLUTIONS									
solvent-free		✓	✓				✓		✓
solvent-based	✓			✓	✓	✓		✓	

AREAS OF APPLICATION

outside	●	●	●	●	●	●	●	●	●
ventilated inside	●	●	●	●	●	●	●	●	●
unventilated inside	●	●	●	●	●	●	●	●	●

SUBSTRATES

MINERAL									
Concrete	●	●	●	●	●	●	●	●	●
Screed	●	●	●	●	●	●	●	●	●
Asphalt	●	●	●	●	●	●	●	●	●
WOOD									
Wood	●	●	●	●	●	●	●	●	●
OSB boards	●	●	●	●	●	●	●	●	●
METAL									
Aluminium	●	●	●	●	●	●	●	●	●
Metal not galvanised	●	●	●	●	●	●	●	●	●
Galvanised metal	●	●	●	●	●	●	●	●	●
ARTIFICIALS									
EPDM	●	●	●	●	●	●	●	●	●
Bitumen sheeting	●	●	●	●	●	●	●	●	●
PVC sheets	●	●	●	●	●	●	●	●	●
FPO / TPO tracks	●	●	●	●	●	●	●	●	●
Other plastics	●	●	●	●	●	●	●	●	●
OTHER									
Bitumen thick coating	●	●	●	●	●	●	●	●	●
Tiles / fine stoneware	●	●	●	●	●	●	●	●	●
Glass	●	●	●	●	●	●	●	●	●
Natural stone	●	●	●	●	●	●	●	●	●
Thermal insulation materials	●	●	●	●	●	●	●	●	●
non-solvent resistant substrates	●	●	●	●	●	●	●	●	●

Availability : ✓ In Stock ⊖ not in Stock

TABLES

PRIMER OVERVIEW

- suitable
 - Suitability test required
 - not suitable
- * fire-dried quartz sand in excess
0,4-0,8mm

TAURUS PRIMER FAST	TAURUS PRIMER 2K	TAURUS EPOXY PRIMER 2K	TAURUS PRIMER CLEAR	TAURUS PVC PRIMER	TAURUS TPO / FPO PRIMER	TAURUS ÖKOFLEX PRIMER	TAURUS NANO PRIMER	TAURUS AQUATOP MONO PRIMER
--------------------	------------------	------------------------	---------------------	-------------------	-------------------------	-----------------------	--------------------	----------------------------

PRIMER FOR

TAURUS AQUATOP 2K	●	●	●	●	●	●	●	●
TAURUS AQUATOP MONO	●	●	●	●	●	●	●	●
TAURUS TOP / TOP DETAIL	●	●	●	●	●	●	●	●
TAURUS ÖKOFLEX	●*	●*	●*	●	●	●	●	●
TAURUS ÖKOFLEX PRO	●	●	●	●	●	●	●	●
TAURUS BLACK 2K	●	●	●	●	●	●	●	●
TAURUS BLACK	●	●	●	●	●	●	●	●

COMPATIBILITY TABLE

- suitable
- not suitable

* fire-dried quartz sand in excess 0,4-0,8mm

COATING ON EXISTING SUBSTRATE

EXISTING SUBSTRATE

	TAURUS AQUATOP 2K	TAURUS ÖKOFLEX	TAURUS TOP / TOP DETAIL	TAURUS BLACK / BLACK 2K	TAURUS PRIMER FAST	TAURUS PRIMER 2K	TAURUS EPOXY PRIMER 2K	TAURUS TPO/FPO PRIMER	TAURUS PRIMER CLEAR	TAURUS NANO PRIMER	TAURUS AQUATOP MONO PRIMER
TAURUS AQUATOP 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS AQUATOP MONO	●	●	●	●	●	●	●	●	●	●	●
TAURUS TOP COAT	●	●	●	●	●	●	●	●	●	●	●
TAURUS TOP COAT 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS TERRA COAT	●	●	●	●	●	●	●	●	●	●	●
TAURUS TERRA COAT PRO	●	●	●	●	●	●	●	●	●	●	●
TAURUS TERRA COAT 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS TERRA COAT EP 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS BLACK / TAURUS BLACK 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS POLYUREA 2K	●	●	●	●	●*	●*	●*	●	●	●	●
TAURUS EPOXY FLOOR 2K	●	●	●	●	●	●	●	●	●	●	●
TAURUS ELASTIC PRO	●	●	●	●	●	●	●	●	●	●	●
TAURUS PRIMER FAST	●	●*	●	●	●	●	●	●	●	●	●
TAURUS PRIMER 2K	●	●*	●	●	●	●	●	●	●	●	●
TAURUS EPOXY PRIMER 2K	●	●*	●	●	●	●	●	●	●	●	●
TAURUS TPO/FPO PRIMER	●	●	●	●	●	●	●	●	●	●	●
TAURUS PRIMER CLEAR	●	●	●	●	●	●	●	●	●	●	●

FOUNDATIONS



TAURUS PU PRIMER



Extremely fast drying, one-component, low viscosity PU-based primer.

- Very short curing time
- Penetrates deep into the surface
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** 100-300g/m²

Art. No.	Product	Description	PU	
H050307014	TAURUS PU PRIMER 4lt	One-component, low PU based primer for smooth and porous substrates.	4lt	✓



TAURUS PRIMER FAST



Extremely fast drying, one-component, low viscosity PU-based primer.

- Very short curing time
- Penetrates deep into the surface
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** 100-300g/m²

Art. No.	Product	Description	PU	
H050305701	TAURUS PRIMER FAST 1lt	One-component, low PU based primer with low viscosity, suitable for smooth and porous surfaces.	1lt	✓
H050305704	TAURUS PRIMER FAST 4lt		4lt	✓



TAURUS PRIMER 2K



Solvent-free, two-component primer specially developed for STT® TAURUS LIQUID PLASTICS.

- universally usable
- short curing time
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** 100-300g/m²

Art. No.	Product	Description	PU	
H050305001	TAURUS PRIMER 2K 1kg	Solvent-free, two-component primer, specially developed for strong adhesive bonds on bitumen, asphalt and concrete.	Comp. A 0,40kg Comp. B 0,60kg	✓
H050305100	TAURUS PRIMER 2K 4kg		Comp. A 1,60kg Comp. B 2,40kg	✓
H050305101	TAURUS PRIMER 2K 20kg		Comp. A 8kg Comp. B 12kg	✓

TAURUS EPOXY PRIMER 2K



Solvent-free, two-component, water-based epoxy resin primer/coating.

- very short curing time at temperatures above 25°C
- Simple mixing ratio 1:1
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app.150g/m²

Art. No.	Product	Description	PU	
H050301005	TAURUS EPOXY PRIMER 2K 8kg	Epoxy resin primer that can be coloured with water-based pigment pastes.	Comp. A 4kg Comp. B 4kg	✓

TAURUS NANO PRIMER



Solvent-based, low-viscosity, aliphatic primer for old substrates.

- 100% aliphatic
- Extremely strong adhesion
- **Curing time:** approx. 6 hrs.
- **Recoat after:** 12-24 hrs.

Art. No.	Product	Description	PU	
H050305470	TAURUS NANO PRIMER 4lt	Non-yellowing primer for old undercoats that do not show signs of ageing when refreshed.	4lt	✓

TAURUS TPO / FPO PRIMER



One-component, fast drying, low viscosity primer, and at the same time a cleaner for TPO and FPO flat roofing membranes.

- Very short flash-off time
- Very low consumption
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** ca. 100g/m²

Art. No.	Product	Description	PU	
H050305801	TAURUS TPO / FPO PRIMER 1lt	Special one-component primer and cleaner for old and new TPO and FPO membranes.	1lt	✓

FOUNDATIONS

TAURUS PVC PRIMER



Single-component, quick-drying, low-viscosity primer which is also a cleaner for PVC flat roof membranes.

- Very short flash-off time
- Very low consumption
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app. 100g/m²

Art. No.	Product	Description	PU	
H050305901	TAURUS PVC PRIMER 1lt	Special one-component primer and Cleaner for old and new PVC membranes.	1lt	✓

TAURUS PRIMER CLEAR



Crystal clear, non-yellowing, one-component, quick-drying, solvent-based, low-viscosity primer.

- Very short flash-off time
- Very low consumption
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app. 100-150g/m²

Art. No.	Product	Description	PU	
H050305130	TAURUS PRIMER CLEAR 1lt	Special one-component, aliphatic primer for substrates that are visibly should remain barred.	1lt	✓

CONFAST REPARATURMÖRTEL



Cement-bound repair mortar for all types of standard mineral substrates in a layer thickness of 1-100 mm.

- fibre-reinforced
- Very high adhesion to concrete and masonry
- Good weather and sulphate resistance
- **Bulk density:** 1,6kg/lt.
- **Adhesive tensile strength:** 1,8N/mm²
- **Substrate temperature:** +5°C to +35°C
- **Consumption:** 1,6kg/m² per layer thickness

Art. No.	Product	Description	PU	
H050602010	CONFAST REPARATURMÖRTEL 20kg	Universal repair mortar	25kg	✓

CONFAST BODENVERLAUFSMASSE



Fast curing and early strength levelling compound for concrete surfaces.

- Long processing time
- Variable layer thicknesses
- Extreme compressive strength

Art. No.	Product	Description	PU	
H050603020	CONFAST BODENVERLAUFSMASSE 20kg	Floor levelling compound on concrete surfaces	20kg	✓

CONFAST REACT FAST 2K



Two-component, extremely fast-drying reactive waterproofing. Can be used indoors and outdoors as a bonded waterproofing.

- Easy to use
- Very strong adhesion
- High weather and UV resistance
- **PH value:** 10-11
- **Processing time:** 45 min
- **Processing temperature:** +5°C to +35°C
- Consumption: app. 1,20-1,40 kg/m² per 1mm

Art. No.	Product	Description	PU	
H050801010	CONFAST REACT FAST 2K	Strongly adhesive, highly flexible mineral sealant	Comp. A 20kg Comp. B 10kg	✓

CONFAST ARMIERUNGSGEWEBE FEIN

Reinforcing mesh for processing in microcement



- Easy to use
- Colour: white

Art. No.	Product	Description	PU	
H060506030	CONFAST ARMIERUNGSGEWEBE FEIN	Reinforcing mesh	100lfm x 50m	✓

LIQUID PLASTICS

FOUNDATIONS

TAURUS FÜLLSTOFF



Filler for the production of scratch coats

- Simple dosing
- for filling EP and PU resins
- fine powder

Art. No.	Product	Description	PU	
H050408021	TAURUS FÜLLSTOFF 20kg	for filling EP and PU resins	20kg	✓

QUARZSAND Beige feuergetrocknet



Natural quartz sand, round grain, washed and fire-dried.

- fire-dried
- beige - grey
- Grain size: 0,4-0,8mm

Art. No.	Product	Description	PU	
S992057049	QUARZSAND Beige feuergetrocknet 0,4-0,8mm	Natural quartz sand	25kg	✓
S991657063	QUARZSAND Beige feuergetrocknet 0,06-0,3mm	Natural quartz sand	25kg	✓

SEALINGS

TAURUS AQUATOP 2K



Two-component, solvent-free, permanently UV-stable liquid plastic on an aqueous polyurethane base in accordance with ETAG 005.

- quick-drying
- open to diffusion
- crack-bridging

- **Processing temperature:** +5°C to +30°C
- **Consumption:** app. 2,7kg/m²

Art. No.	Product	Description	PU	
H050306060	TAURUS AQUATOP 2K 2,425kg	Two-component, aliphatic, permanently UV-stable, water-based liquid plastic.	Comp. A 0,025kg Comp. B 2,4kg	⊖
H050306063	TAURUS AQUATOP 2K 12,125kg		Comp. A 0,125kg Comp. B 12kg	⊖

TAURUS AQUATOP MONO



One-component, aliphatic, water-based, UV-stable polyurethane liquid plastic, tested in accordance with ETAG 005.

- solvent-free
- quick-drying
- thixotropic
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app. 2,5kg/m²

Art. No.	Product	Description	PU	
H050306070	TAURUS AQUATOP MONO 12kg	One-component, solvent-free, UV stable polyurethane liquid plastic.	12kg	✓

TAURUS TOP



One-component, aromatic, UV-stable, polyurethane-based liquid plastic, tested in accordance with ETAG 005.

- quick-drying
- crack-bridging
- Can be used all year round
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app. 2,5kg/m²

Art. No.	Product	Description	PU	
H050302102	TAURUS TOP 1kg	Single-component, solvent-based, aromatic liquid plastic based on polyurethane.	1kg	✓
H050302116	TAURUS TOP 6kg		6kg	✓
H050302125	TAURUS TOP 25kg		25kg	✓

TAURUS TOP STELLMITTEL



Additive for STT® TAURUS TOP

- Increase in thixotropy
- No system fleece necessary
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** 10-30%

Art. No.	Product	Description	PU	
H050406010	TAURUS TOP STELLMITTEL	Additive for STT® TAURUS TOP	1kg	✓

SEALINGS

TAURUS TOP DETAIL



Single-component, fibre-reinforced, permanently UV-stable liquid plastic, tested in accordance with ETAG 005.

- Rainproof immediately after application
- No system fleece necessary
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** app. 2,5kg/m²

Art. No.	Product	Description	PU	
H050302104	TAURUS TOP DETAIL 1kg	One-component, solvent-based, fibre-reinforced liquid plastic.	1kg	✓
H050302105	TAURUS TOP DETAIL 5kg		5kg	✓

TAURUS TOP COAT



One-component, transparent, aliphatic polyurethane, which cures through moisture cross-linking.

- Fast curing
- Low consumption
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Consumption:** 100-150g/m²

Art. No.	Product	Description	PU	
H050308004	TAURUS TOP COAT 4lt	One-component, transparent, aliphatic polyurethane.	4lt	✓

TAURUS ELASTIC PRO



Solvent-free, one-component, UV-resistant, extremely elastic liquid plastic.

- Very high chemical resistance
- for bonding and sealing STT® films, concrete joints etc.
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Service temperature:** -40°C to $+100^{\circ}\text{C}$

Art. No.	Product	Description	PU	
H050401226	TAURUS ELASTIC PRO grau 600ml	Extremely elastic liquid plastic for bonding and sealing STT® films, concrete joints, etc.	600ml (x15 pcs./box)	✓
H050401126	TAURUS ELASTIC PRO weiß 600ml		600ml (x15 pcs./box)	✓
H050401660	TAURUS ELASTIC PRO schwarz 600ml		600ml (x15 pcs./box)	✓

TAURUS FUGENGLATT



Dispersion-based smoothing agent for STT® TAURUS ELASTIC PRO as well as for MS hybrids and silicones.

- solvent-free
- for perfect joint surfaces

Art. No.	Product	Description	PU	
H060507021	TAURUS FUGENGLATT 250ml	Dispersion-based smoothing agent	250ml	✓

TAURUS RAPID CURE



Solvent-free, thixotropic, fast-curing polyurethane adhesive.

- Quick drying
- Highly temperatureresistant
- **Processing temperature:** $\geq +5^{\circ}\text{C}$
- **Tack-free:** 30 minutes (at 25°C and 55% r.h.)

Art. No.	Product	Description	PU	
H050410010	TAURUS RAPID CURE 600ml	Quick-drying polyurethane adhesive, also suitable for vertical bonding due to its high thixotropy.	600ml (x20pcs/box)	✓

TAURUS ÖKOFLEX



One-component, solvent-free, UV-stable, flexible, water-based liquid plastic according to ETAG 005.

- Quick drying
- Extremely stretchy and abrasionresistant
- Can be tiled immediately after drying
- For indoor and outdoor use
- **Drying time:** 1,5h
- **Tensile strength:** 0,42MPa
- **Processing temperature:** $+5^{\circ}\text{C}$ to $+35^{\circ}\text{C}$
- **Consumption:** 2,6kg/m²

Art. No.	Product	Description	PU	
H050314011	TAURUS ÖKOFLEX 20kg	One-component, solvent-free, waterbased liquid plastic in accordance with ETAG 005.	20kg	✓

SEALINGS

TAURUS ÖKOFLEX PRO



One-component, solvent-, plasticiser- and isocyanate-free, UV-stable liquid plastic in accordance with ETAG 005.

- ready for use
- Rainproof after 1 hour
- Can be walked on after 24 hours
- For indoor and outdoor use
- **Processing time:** 20-30 Min.
- **Useful life:** W3 (25 years)
- **Processing temperature:** +10°C to +30°C
- **Consumption:** app. 2,50kg/m²

Art. No.	Product	Description	PU	
H050314100	TAURUS ÖKOFLEX PRO 5kg	Single-component, solvent-free, liquid plastic in accordance with ETAG 005	5kg	✓
H050314120	TAURUS ÖKOFLEX PRO 20kg		20kg	✓

TAURUS TW 2K



Two-component, solvent-free, aromatic polyurethane.

- authorised for drinking water
- Long processing time, short curing time
- Can be rolled, sprayed and levelled
- **Processing temperature:** +5°C to +30°C
- **Service temperature:** -40°C to +90°C

Art. No.	Product	Description	PU	
H050308201	TAURUS TW 2K	Two-component polyurethane for coating and sealing drinking water pipes, tanks, swimming pools, etc.	Comp. A 1,5kg Comp. B 7,5kg	✓

TAURUS BLACK



One-component, thixotropic liquid plastic.

- Can be applied without primer
- Ideal for vertical and horizontal applications
- Extremely stretchable
- **Processing temperature:** ≥+5°C
- **Service temperature:** -40°C to +80°C
- **Elongation:** > 400% (at 23°C)

Art. No.	Product	Description	PU	
H050304010	TAURUS BLACK 1kg	One-component liquid plastic.	1kg	✓
H050304015	TAURUS BLACK 5kg		5kg	✓

TAURUS SYSTEMVLIES



Consists of 100% polyester and is used as a layer thickness control and reinforcement insert for Taurus liquid plastics.

- Very good fleece impregnation
- Simple processing
- layer thickness regulating
- **Surface weight:** 110g/m²
- **Tensile strength:** 2,3kN/2,7kN/m
- **Elongation:** 40%/75%

Art. No.	Product	Description	PU	
H050455117	TAURUS SYSTEMVLIES 17cm	Layer thickness control and reinforcement insert for processing on horizontal and vertical surfaces, customised width available on request.	24lfm	✓
H050455126	TAURUS SYSTEMVLIES 26cm		24lfm	✓
H050455135	TAURUS SYSTEMVLIES 35cm		24lfm	✓
H050455052	TAURUS SYSTEMVLIES 52,5cm		24lfm	✓
H050455106	TAURUS SYSTEMVLIES 105cm		24lfm	✓

TAURUS SYSTEMVLIES FERTIGECKE



Used for quick and easy, system-based sealing of external and internal corners.

- Great time saving
- No incision in the ischial area
- Uniform layer thickness throughout
- **Surface weight:** 110g/m²
- **Carrier:** Polyester fleece
- **Dimensions:** app. 80x80mm

Art. No.	Product	Description	PU	
H050411010	TAURUS SYSTEMVLIES FERTIGECKE außen	For quick and easy, system-bound sealing.	1 pcs	✓
H050411020	TAURUS SYSTEMVLIES FERTIGECKE innen		1 pcs	✓

TAURUS POLYUREA 2K



Purely mechanically processable 2-component polyurea hot spray system, tested according to ETAG 005.

- Very elastic membrane
- High elongation and crack bridging
- Extremely short curing time
- **Processing temperature:** +5°C to +35°C
- **Consumption:** app. 1,8-2,4kg/m²

Art. No.	Product	Description	PU	
H050310001	TAURUS POLYUREA 2K	Specially developed for waterproofing flat roofs, swimming pools, etc.	Comp. A 198kg Comp. B 193kg	✓

ACCESSORIES

CLEANER



TAURUS REINIGER

A cleaner for uncured polyurethane and epoxy resins

Art. No.	Product	PU	
H050407002	TAURUS REINIGER 1kg	1kg	✓



TAURUS REINIGER AKTIV

Acid-free, biodegradable, mild, active basic and universal cleaner.

Art. No.	Product	PU	
H050407030	TAURUS REINIGER AKTIV	10lt	✓



TAURUS REINIGER NEUTRAL

Medium viscosity, synthetic neutral cleaner. Each cleaning refreshes the lustre of the surface.

Art. No.	Product	PU	
H050403017	TAURUS REINIGER NEUTRAL	10lt	✓



TAURUS REINIGUNGSTÜCHER

Power cleaning wipes..

Art. No.	Product	PU	
H060902020	TAURUS REINIGUNGSTÜCHER	80 Pcs.	✓



TAURUS VERDÜNNUNG

Solvent for thinning STT® TAURUS TOP or for cleaning machines and tools.

Art. No.	Product	PU	
H050403017	TAURUS VERDÜNNUNG	17lt.	✓

COLOUR PIGMENTS



TAURUS PIGMENTPASTE

Used to individually colour Top Coat, Terra Coat, Epoxy Floor 2K unpigmented and PU Floor 2K unpigmented.

Art. No.	Product	PU	
H050404000	TAURUS PIGMENTPASTE	1kg	✓

SMOOTHING AGENT • OPPORTUNITIES • FILLING MATERIAL



TAURUS FUGENGLATT

Dispersion-based smoothing agent especially for STT® TAURUS ELASTIC PRO.

Art. No.	Product	PU	
H060507021	TAURUS FUGENGLATT (250ml)	0,25lt.	✓


TOOLS • SUPPLIES



TELE-VERLÄNGERUNG ALU 1,20-2,00m

Aluminium, light and robust. Length 1,20m - 2,00m.

Art. No.	Product	PU	
S991021500	TELE-VERLÄNGERUNG ALU 1,20-2,00m	1 Pcs.	✓



BONUSPACK-ROLLER 100mm

Especially for dispersions STT® primers and STT® liquid plastics, with 2 spare rollers

Art. No.	Product	PU	
S991022310	BONUSPACK-ROLLER 100mm	1 Pcs.	✓



FARBROLLER-BÜGEL 250mm

Suitable for thin-bodied, slightly solvent-based paints High-gloss zinc-plated, ergonomic professional handle


Art. No.	Product	PU	
S991023030	FARBROLLER-BÜGEL 250mm	1 Pcs.	✓



FARBROLLER-BÜGEL 100mm

Suitable for thin-bodied, slightly solvent-based paints High-gloss zinc-plated, ergonomic professional handle

Art. No.	Product	PU	
S991022520	FARBROLLER-BÜGEL 100mm	1 Pcs.	✓



LACKWALZE 250mm, PAINT-LINE

For floor sealers, coatings, resin and oil-based paints, epoxy paints, synthetic paints.

Art. No.	Product	PU	
S991026256	LACKWALZE 250mm, PAINT-LINE	1 Pcs.	✓



LASURPINSEL-SET, 3tlg.

Bristle mixture of light bristle and conical brown polyester, galvanised ferrule, green lacquered handle, especially for all solvent and water-based liquids. In the set 1 brush each with 30mm, 50mm and 60mm

Art. No.	Product	PU	
S991070385	LASURPINSEL-SET, 3tlg.	1 Pcs.	✓



HEIZKÖRPERWALZE 100mm, FELT

Professional quality made of best woven polyester. The cover is almost lint-free and gives a smooth surface structure. Ideally suited for low-viscosity, slightly solvent-based paints.

Art. No.	Product	PU	
S991020030	HEIZKÖRPERWALZE 100mm, FELT	1 Pcs.	✓

TOOLS • SUPPLIES



FARBWALZE 250mm, FELT

Professional quality made of best woven polyester. The cover is almost lint-free and gives a smooth surface structure. Ideally suited for low-viscosity, slightly solvent-based paints.

Art. No.	Product	PU	
S991025257	FARBWALZE 250mm, FELT	1 Pcs.	✓



FARBWALZE 250mm, MICROLINE PRO

Professional quality made of the best microfibre. A virtually lint-free cover with side trim enables a uniformly smooth surface structure without streaking.

Art. No.	Product	PU	
S991026255	FARBWALZE 250mm, MICROLINE PRO	1 Pcs.	✓



FARBWALZE 100mm, MICROLINE PRO SHORT

Professional quality made of the best microfibre. A virtually lint-free cover with side trim enables a uniformly smooth surface structure without streaking.

Art. No.	Product	PU	
S991026205	FARBWALZE 100mm, MICROLINE PRO SHORT	1 Pcs.	✓



DOSEN- UND FASSÖFFNER

Suitable for all tin cans, buckets and press-in lid tins.

Art. No.	Product	PU	
H060903110	DOSEN- UND FASSÖFFNER	1 Pcs.	✓



EINDRÜCKDECKELEIMER 10 LITER

Used for airtight storage of product residues.

Art. No.	Product	PU	
R060101010	EINDRÜCKDECKELEIMER 10 LITER	1 Pcs.	✓



MISCHEIMER 10 LITER

Consists of polypropylene and is 100% recyclable.


Art. No.	Product	PU	
R060201001	MISCHEIMER 10 LITER	1 Pcs.	✓



MISCHEIMER 33 LITER

Consists of polypropylene and is 100% recyclable.

Art. No.	Product	PU	
R060201003	MISCHEIMER 33 LITER	1 Pcs.	✓




AUSPRESSPISTOLE 600ml

Squeeze gun for STT® TAURUS ELASTIC PRO and STT® FIX FOLIEN- KLEB UND DICHTSTOFF.

Art. No.	Product	PU	
H060301011	AUSPRESSPISTOLE 600ml	1 Pcs.	✓

TOOLS • SUPPLIES



KARTUSCHENPISTOLE

Sturdy, open, manual cartridge gun with swivelling housing for 300 ml cartridges.

Art. No.	Product	PU	
H060301050	KARTUSCHENPISTOLE	1 Pcs.	✓

WORK SAFETY



GEBOL SCHUTZBRILLE GETÖNT

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.

Art. No.	Product	PU	
H060904012	GEBOL SCHUTZBRILLE TINTED	1 Pcs.	✓



DELTA PLUS SCHUTZBRILLE KLAR

Single lens safety goggles made of polycarbonate. Widened, flattened and flexible temple ends. Integrated polycarbonate nose bridge. Comfortable to wear with hard hat and earmuffs, side shield, scratch resistant and light as a feather. UV/400 solid.

Art. No.	Product	PU	
H060904010	DELTA PLUS SCHUTZBRILLE CLEAR	1 Pcs.	✓




EINWEGHANDSCHUHE NITRIL UNGEPUDERT GR.XL


Professional quality nitrile gloves, heavy duty, non-powdered, suitable for use with food, textured surface on fingertips, can be worn left and right, high tear resistance, rolled edge. Latex free. Dispenser box of 100 pieces.

Art. No.	Product	PU	
H060904023	EINWEGHANDSCHUHE NON-POWDERED SIZE XL	100 Pcs./Box	✓



Date

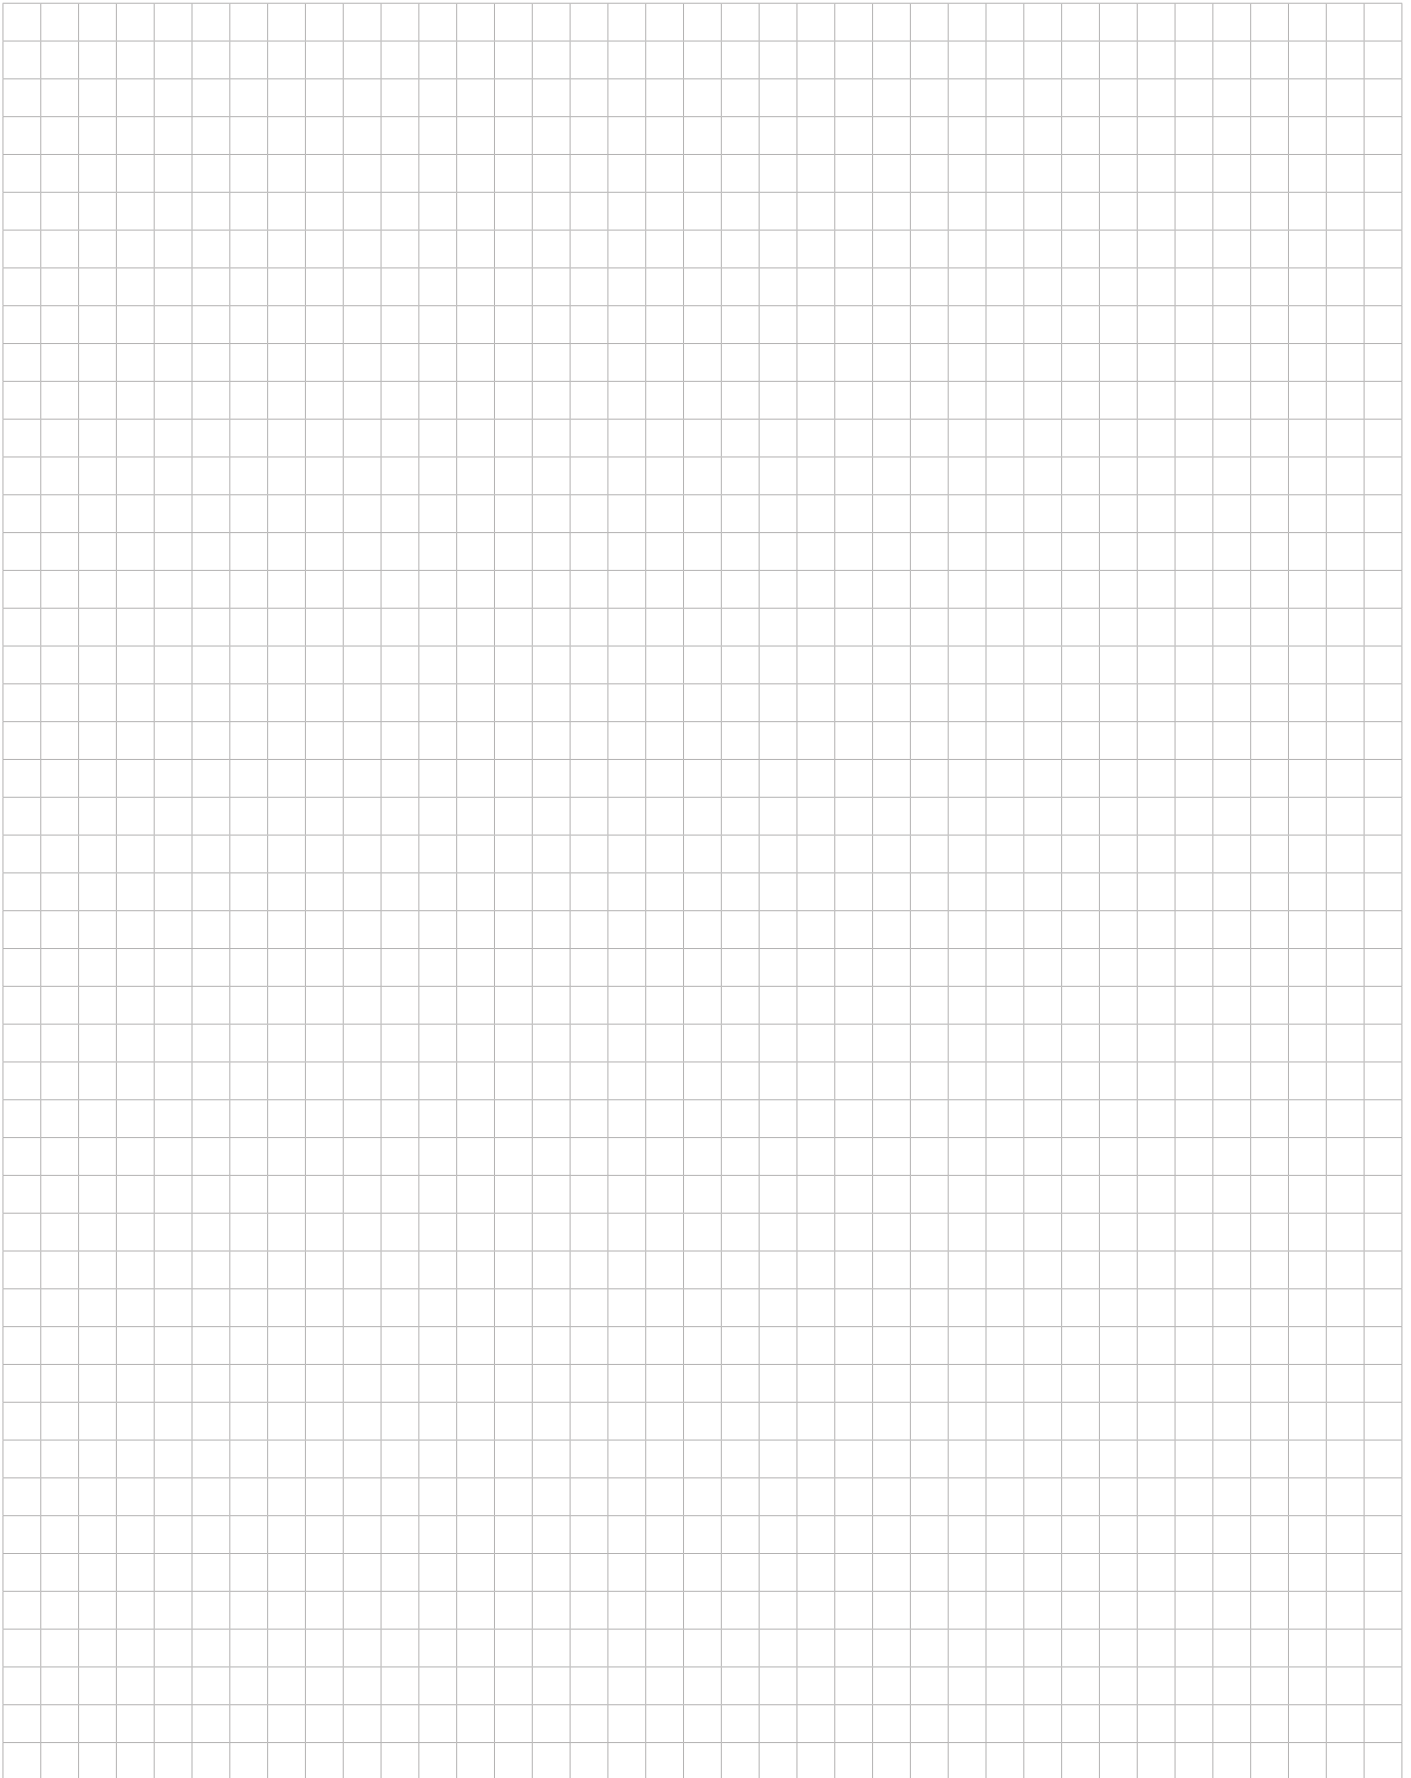

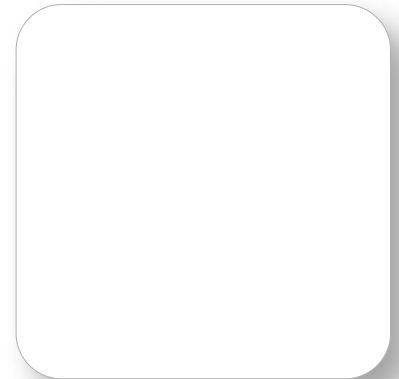

STT GmbH
A-8273 Ebersdorf 226

T: +43 (0) 3333 / 41 241 • E: office@stt-gmbh.at
F: +43 (0) 3333 / 41 240 • I: www.stt-gmbh.at

© STT GmbH | Version: 14.11.2024 Subject to typesetting and printing errors as well as changes.

